

# SPECIFICATIONS

Customer	
Product Name	Wire Wound Molded SMD Power Inductors
Sunlord Part Number	MWSA Series
Customer Part Number	

☒ New Released, ☐ Revised]

SPEC No.: **MWSA06180000**

【This SPEC is total 28 pages including specifications and appendix.】

【ROHS Compliant Parts】

Approved By	Checked By	Issued By

## Shenzhen Sunlord Electronics Co., Ltd.

Address: Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China 518110

Tel: 0086-755-29832660

Fax: 0086-755-82269029

E-Mail: sunlord@sunlordinc.com

### 【For Customer approval Only】

Date: \_\_\_\_\_

Qualification Status: ☐ Full ☐ Restricted ☐ Rejected

Approved By	Verified By	Re-checked By	Checked By

Comments:

\_\_\_\_\_

【Version change history】

Rev.	Effective Date	Changed Contents	Change Reasons	Approved By
01	/	New release	/	Hai Guo

**Caution:**

All products listed in this specification are developed, designed and intended for use in general electronics equipment. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require especially high reliability, or whose failure, malfunction or trouble might directly cause damage to society, person, or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below. Please contact us for more details if you intend to use our products in the following applications.

1. Aircraft equipment
2. Aerospace equipment
3. Undersea equipment
4. nuclear control equipment
5. military equipment
6. Power plant equipment
7. Medical equipment
8. Transportation equipment (automobiles, trains, ships,etc.)
9. Traffic signal equipment
10. Disaster prevention / crime prevention equipment
11. Data-processing equipment
12. Applications of similar complexity or with reliability requirements comparable to the applications listed in the above

**1. Scope**

This specification applies to MWSA series of wire wound molded SMD power Inductors

**2. Product Description and Identification (Part Number)**

## 1) Description

Wire Wound Molded SMD Type Power Inductor, MWSAXXXX, XX  $\mu\text{H} \pm X\%$  @XXX KHz/XXXV, XXXm $\Omega$ , XXXm A.

## 2) Product Identification (Part Number)

MWSA   XXXX   -XXX   □   I  
 ①            ②            ③            ④            ⑤

①	Type
MWSA	Wire wound molded SMD power Inductors

②	External Dimensions (mm)
	0412~1205

③	Nominal Inductance
Example	Nominal Value
1R0	1.0 $\mu\text{H}$
100	10 $\mu\text{H}$
101	100 $\mu\text{H}$

④	Inductance Tolerance
M	$\pm 20\%$

⑤	Packing
T	Tape Carrier Package


**3. Electrical Characteristics**

Please refer to **Appendix A**.

- Operating temperature range (Including self-heating):  $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$ .
- Storage temperature and humidity range (product with tapping ):  $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$ , RH 70% Max.

**4. Shape and Dimensions**

- Dimensions and recommended PCB pattern for reflow soldering: See **Fig.4-1** and **Table 4-1**.

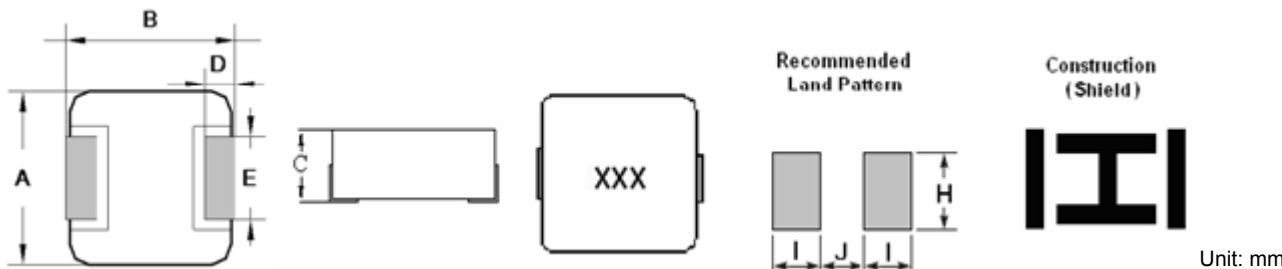

Series	A	B	C	D	E	I typ.	J typ.	H typ.
MWSA0412	4.2 $\pm 0.25$	4.4 $\pm 0.35$	1.0 $\pm 0.2$	0.8 $\pm 0.3$	2.0 $\pm 0.3$	1.5.	2.2	2.5
MWSA0402	4.2 $\pm 0.25$	4.4 $\pm 0.35$	1.8 $\pm 0.2$	0.8 $\pm 0.3$	2.0 $\pm 0.3$	1.5.	2.2	2.5
MWSA0518	5.2 $\pm 0.2$	5.4 $\pm 0.3$	1.6 $\pm 0.2$	1.20 $\pm 0.2$	2.2 $\pm 0.3$	1.9.	2.2	2.5
MWSA0503	5.2 $\pm 0.2$	5.4 $\pm 0.3$	2.8 $\pm 0.2$	1.20 $\pm 0.2$	2.2 $\pm 0.3$	1.9.	2.2	2.5
MWSA0618	6.6 $\pm 0.2$	7.0 $\pm 0.3$	1.6 $\pm 0.2$	1.60 $\pm 0.3$	3.0 $\pm 0.3$	2.35	3.7	3.5
MWSA0624	6.6 $\pm 0.2$	7.0 $\pm 0.3$	2.2 $\pm 0.2$	1.60 $\pm 0.3$	3.0 $\pm 0.3$	2.35	3.7	3.5
MWSA0603	6.6 $\pm 0.2$	7.0 $\pm 0.3$	2.8 $\pm 0.2$	1.60 $\pm 0.3$	3.0 $\pm 0.3$	2.35	3.7	3.5
MWSA1004	10.0 $\pm 0.3$	11.5Max	3.8 $\pm 0.2$	2.0 $\pm 0.5$	3.0 $\pm 0.5$	4.1	5.4	4.1
MWSA1205	12.6 $\pm 0.3$	13.45 $\pm 0.35$	4.8 $\pm 0.2$	2.0 $\pm 0.5$	See Remarks	3.25	8.0	5.0


Remarks:

Code	Dimensions	
	R36/R50/R68 1R0/1R5/2R2	3R3/100/150 220/330/470
E	3.85 $\pm 0.5$	5.0 $\pm 0.5$

Structure and Components: See **Table 4-2**

**Table 4-2]**

Symbol	Components	Material
a	MARKING	Ink(black)
b	CORE	Alloy Sponge Powder
c	WIRE	Polyurethane copper wire
d	Terminal	Copper plated with Sn

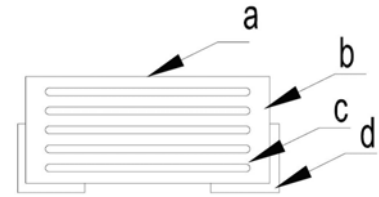

## 5. Test and Measurement Procedures

### 5.1 Test Conditions

5.1.1 Unless otherwise specified, the standard atmospheric conditions for measurement/test as:

- Ambient Temperature:  $20 \pm 15^{\circ}\text{C}$
- Relative Humidity:  $65 \pm 20\%$
- Air Pressure: 86 KPa to 106 KPa

5.1.2 If any doubt on the results, measurements/tests should be made within the following limits:

- Ambient Temperature:  $20 \pm 2^{\circ}\text{C}$
- Relative Humidity:  $65 \pm 5\%$
- Air Pressure: 86KPa to 106 KPa

### 5.2 Visual Examination

- Inspection Equipment: 10 X magnifier

### 5.3 Electrical Test

5.3.1 DC Resistance (DCR)

- Refer to **Appendix A**.
- Test equipment (Analyzer): HIOKI3540 or equivalent.

5.3.2 Inductance (L)

- Refer to **Appendix A**.
- Test equipment: Wayne kerr3260+3265B or equivalent.

5.3.3 Rated Current

- Refer to **Appendix A**.
- Test equipment: Wayne kerr3260+3265B, Agilent E3633A, R2M-2H3 or equivalent.
- Definition of Rated Current (Ir): With the condition of the DC current pass, the inductance decrease by 30% of the standard value, compare to the temperature rise by  $40^{\circ}\text{C}$ , the smaller is Rated Current.(reference environment temperature: $20^{\circ}\text{C}$ )

### 5.4 Reliability Test

Mechanical Reliability		
Item	Specification and Requirement	Test Method
Solderability	The surface of terminal immersed shall be minimum of 95% covered with a new coating of solder	Solder heat proof: 1. Preheating: $160 \pm 10^{\circ}\text{C}$ 2. Retention time: $245 \pm 5^{\circ}\text{C}$ for $2 \pm 0.5$ seconds
Vibration	Inductance change: Within $\pm 10\%$ Without mechanical damage such as break	1. Vibration frequency: (10 Hz to 55 Hz to 10Hz) in 60 seconds as a period 2. Vibration time: Period cycled for 2 hours in each of 3 mutual perpendicular directions. 3. Amplitude: 1.5 mm max.
Shock	Inductance change: Within $\pm 10\%$ Without mechanical damage such as break	1. Peak value: 100 G 2. Duration of pulse: 11ms 3. 3 times in each positive and negative direction of 3 mutual perpendicular directions
Endurance Reliability		
Item	Specification and Requirement	Test Method
Thermal Shock	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	1. Repeat 100 cycles as follow: ( $-55 \pm 2^{\circ}\text{C}$ ; $30 \pm 3$ min) →(Room temp., 5 min)

		<p>→ (+125 ± 2 °C, 30 ± 3 min)</p> <p>→ (Room temp., 5 min)</p> <p>2. Recovery: 48 + 4 / -0 hours of recovery under the standard condition after the test.</p>
High Temperature Resistance	Inductance change: Within ± 10% Without distinct damage in appearance	<p>1. Environment condition: 85 ± 2 °C</p> <p>Applied Current: Rated current</p> <p>2. Duration: 1000 + 4 / -0 hours</p>
Humidity Resistance	Inductance change: Within ±10% Without distinct damage in appearance	<p>1. Environment condition: 60 ± 2 °C</p> <p>Humidity: 90–95%</p> <p>Applied Current: Rated current</p> <p>2. Duration: 1000 + 4 / -0 hours</p>
Low Temperature Store	Inductance change: Within ± 10% Without distinct damage in appearance	<p>Store temperature:</p> <p>-55 ± 2 °C, 1000 + 4 / -0 hours</p>
High Temperature Store	Inductance change: Within ± 10% Without distinct damage in appearance	<p>Store temperature:</p> <p>+125 ± 2 °C, 1000 + 4 / -0 hours</p>

## 6. Packaging, Storage and Transportation

### 6.1 Tape Carrier Packaging:


Packaging code: T

(1) Tape carrier packaging are specified in attached figure Fig.6.1-1~2

(2) Tape carrier packaging quantity:

Type	Standard Quantity (pcs/reel)	Type	Standard Quantity (pcs/reel)
MWSA0412	3000	MWSA0624	1500
MWSA0402	3000	MWSA0603	1500
MWSA0518	2000	MWSA1004	500
MWSA0503	2000	MWSA1205	500
MWSA0618	1500		


#### a. Taping Drawings (Unit: mm)

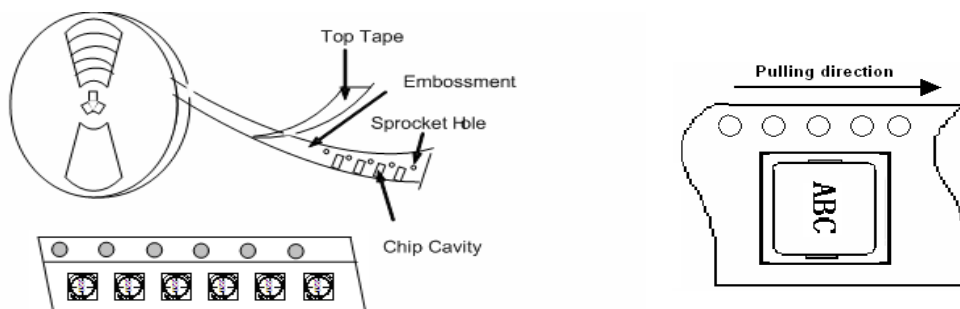

**Remark:** The sprocket holes are to the right as the tape is pulled toward the user.

**Fig.6.1-1**

#### b. Reel and Taping Dimensions (Unit: mm)

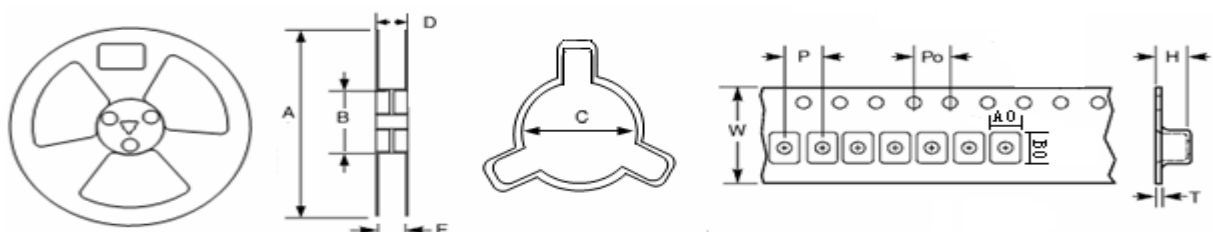


**Fig.6.1-2**

Type	Reel dimensions (mm)					Tape dimensions (mm)						
	A	B	C	D	E	W	P	P0	H	T	A0	B0
MWSA0412	330±2.0	100±1.0	13±1.0	16.5±0.9	12.5±0.5	12±0.3	8±0.1	4±0.1	1.4±0.15	0.35±0.05	4.5±0.1	4.8±0.1
MWSA0402	330±2.0	100±1.0	13±1.0	16.5±0.6	12.5±0.2	12±0.3	8±0.1	4±0.1	2.5±0.15	0.35±0.05	4.5±0.1	4.8±0.1
MWSA0518	330±2.0	100±1.0	13±1.0	16.5±0.6	12.5±0.2	12±0.3	8±0.1	4±0.1	2.3±0.15	0.35±0.05	5.7±0.1	5.9±0.1
MWSA0503	330±2.0	100±1.0	13±1.0	16.5±0.6	12.5±0.2	12±0.3	8±0.1	4±0.1	3.3±0.15	0.35±0.05	5.7±0.1	5.9±0.1
MWSA0618	330±2.0	100±1.0	13±1.0	20.5±0.6	16.5±0.2	16±0.3	12±0.1	4±0.1	2.3±0.15	0.31±0.05	7.2±0.1	7.5±0.1
MWSA0624	330±2.0	100±1.0	13±1.0	20.5±0.6	16.5±0.2	16±0.3	12±0.1	4±0.1	3.6±0.15	0.31±0.05	7.2±0.1	7.5±0.1
MWSA0603	330±2.0	100±1.0	13±1.0	20.5±0.6	16.5±0.2	16±0.3	12±0.1	4±0.1	3.6±0.15	0.31±0.05	7.2±0.1	7.5±0.1
MWSA1004	330±2.0	100±1.0	13±1.0	28.5±0.6	24.5±0.2	24±0.3	16±0.1	4±0.1	4.5±0.1	0.35±0.025	10.7±0.1	12.0±0.1
MWSA1205	330±2.0	100±1.0	13±1.0	28.5±0.6	24.5±0.2	24±0.3	16±0.1	4±0.1	5.4±0.15	0.5±0.05	13.4±0.1	14.4±0.1

c.Inner boxes high for 30mm or 35mm on 12-16mm Carrier tape, Inner boxes high for 35mm or 40mm on 24mm Carrier tape. A reel of a box .

d.Peeling off force: 10gf to 130gf in the direction show below.

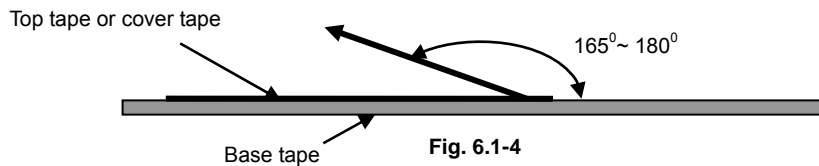

## 6.2 Storage

- (1) The solderability of the external electrodes may deteriorate if packages are stored in high humidity. Besides, to ensure packing material's good state, packages must be stored at -10℃ to 40℃ and 70% RH Max.
- (2) The solderability of the external electrodes may deteriorate if packages are exposed to dust or harmful gas (e.g. HCl, sulfurous gas of H<sub>2</sub>S).
- (3) Packaging materials may deform if packages are exposed directly to sunlight.
- (4) Minimum packages, such as polyvinyl heat-seal packages shall not be opened until they are used. If opened, use the reels as soon as possible.
- (5) Solderability shall be guaranteed for a period of time from the date of delivery on condition that they are stored at the specified environment. For those parts, which passed more than the time shall be checked solderability before using.
- (6) For magnetic products, keep clear of anything that may generate magnetic fields to avoid change of products performance.
- (7) To avoid any damage to products, do not load mechanic force on products or place heavy goods on products, and exclude strong vibration or drop.
- (8) In case of storage over 12 months, solderability shall be checked before actual usage.

## 7. Warning and Attention

### 7.1 Precautions on Use


- (1) Always wear static control bands to protect against ESD.
- (2) Any devices used with the products (soldering irons, measuring instruments) should be properly grounded.
- (3) Keep bare hands and metal conductors (i.e., metal desk) away from electrodes or conductive areas that lead to electrodes.
- (4) Preheat when soldering.
- (5) Don't apply current in excess of the rated current value. It may reduce the impedance or inductance, or cause damage to components due to over-current.
- (6) For magnetic products, keep clear of anything that may generate magnetic fields such as speakers and coils. Use non-magnetic tweezers when handling the chips.
- (7) When soldering, the electrical characteristics may be varied due to hot energy and mechanical stress.
- (8) When coating products with resin, the relatively high resin curing stress may change the electrical characteristics. For exterior coating, select resin carefully so that electrical and mechanical performance of the product is not affected. Before using, please evaluate reliability with the product mounted in your application set.
- (9) When mount chips with adhesive in preliminary assembly, do appropriate check before the soldering stage, i.e., the size of land pattern, type of adhesive, amount applied, hardening of the adhesive on proper usage and amounts of adhesive to use.
- (10) Mounting density: Add special attention to radiating heat of products when mounting other components nearby. The excessive heat by other products may cause deterioration at joint of this product with substrate.
- (11) Since some products are constructed like an open magnetic circuit, narrow spacing between components may cause magnetic coupling.
- (12) Please do not give the product any excessive mechanical shocks in transportation.
- (13) Please do not touch wires by sharp terminals such as tweezers to avoid causing any damage to wires.
- (14) Please do not add any shock and power to the soldered product to avoid causing any damage to chip body.

- (15) Please do not touch the electrodes by naked hand as the solderability of the external electrodes may deteriorate by grease or oil on the skin.


## 7.2 PCB Bending Design

The following shall be considered when designing and laying out PCB's.

- (1) PCB shall be designed so that products are not subjected to the mechanical stress from board warp or deflection.

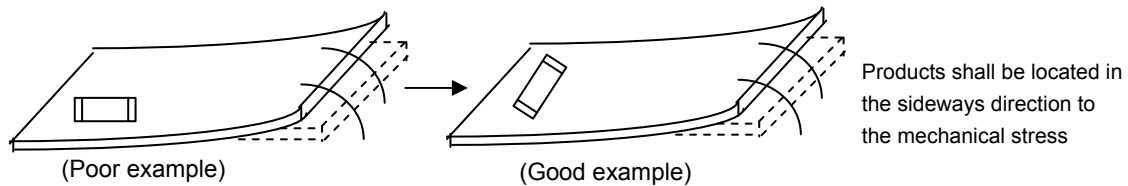

- (2) Products location on PCB separation.

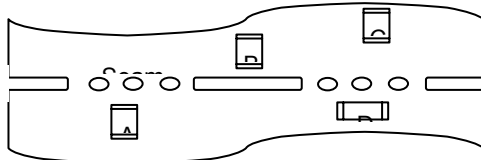

Product shall be located carefully because they may be subjected to the mechanical stress in order of  $A > C = B > D$ .

- (3) When splitting the PCB board, or insert (remove) connector, or fasten thread after mounting components, care is required so as not to give any stress of deflection or twisting to the board. Because mechanical force may cause deterioration of the bonding strength of electrode and solder, even crack of product body. Board separation should not be done manually, but by using appropriate devices.

## 7.3 Recommended PCB Design for SMT Land-Patterns

When chips are mounted on a PCB, the amount of solder used (size of fillet) can directly affect chip performance. Therefore, the following items must be carefully considered in the design of solder land patterns:

- (1) The amount of solder applied can affect the ability of chips to withstand mechanical stresses which may lead to breaking or cracking. Therefore, when designing land-patterns it is necessary to consider the appropriate size and configuration of the solder pads which in turn determines the amount of solder necessary to form the fillets.
- (2) When more than one part is jointly soldered onto the same land or pad, the pad must be designed that each component's soldering point is separated by solder-resist.

Recommended land dimensions please refer to product specification.


## 8 Recommended Soldering Technologies

### 8.1 Re-flowing Profile:

- △ Preheat condition: 150 ~ 200°C/60~120sec.
- △ Allowed time above 217°C: 60~90sec.
- △ Max temp: 260°C
- △ Max time at max temp: 10sec.
- △ Solder paste: Sn/3.0Ag/0.5Cu
- △ Allowed Reflow time: 2x max

Please refer to **Fig. 8.1**

[Note: The reflow profile in the above table is only for qualification and is not meant to specify board assembly profiles. Actual board assembly profiles must be based on the customer's specific board design, solder paste and process, and should not exceed the parameters as the Reflow profile shows.]

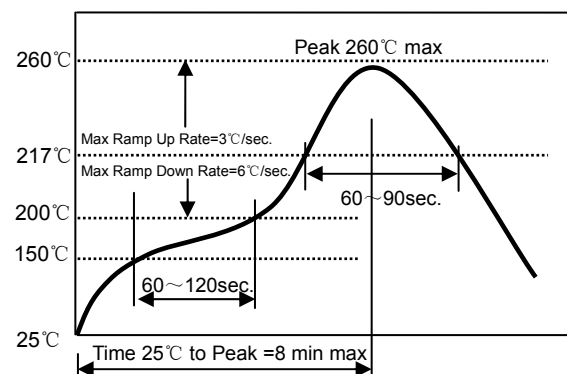

**Fig. 8.1**

### 8.2 Iron Soldering Profile

- △ Iron soldering power: Max. 30W
- △ Pre-heating: 150°C/60sec.
- △ Soldering Tip temperature: 350°C Max.
- △ Soldering time: 3sec. Max.
- △ Solder paste: Sn/3.0Ag/0.5Cu
- △ Max.1 times for iron soldering


Please refer to **Fig. 8.2**.

[Note: Take care not to apply the tip of the soldering iron to the terminal electrodes.]

### 8.3 Recommended Soldering Technologies

#### Heat Gun Profile


- △ Soldering tip temperature: 350°C Max.
- △ Hot air time: <5sec (over 5sec may cause wiring inductor short)
- △ When repairing or reworking the component near inductors, take over-heat protection for Inductors

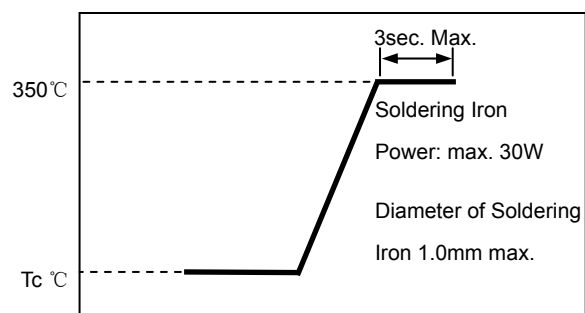

**Fig. 8.2.**

## 9. Solder Volume

Solder shall be used not to exceed as shown below. Exceeding solder volume may cause the failure of mechanical or electrical performance.

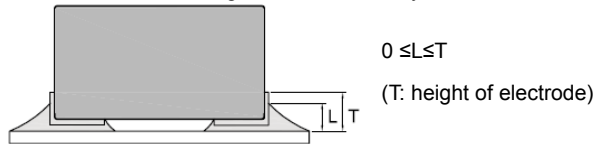

## 10. Supplier Information

- a) Supplier:  
**Shenzhen Sunlord Electronics Co., Ltd.**
- b) Manufacturer:  
**Shenzhen Sunlord Electronics Co., Ltd.**
- c) Manufacturing Address:  
**Sunlord Industrial Park, Dafuyuan Industrial Zone, Guanlan, Shenzhen, China**  
**Zip: 518110**

## Appendix A: Electrical Characteristics

### MWSA0412 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA0412-R15MT	0.15	100k, 1.0V	9.0	15.0	7.5
MWSA0412-R22MT	0.22	100k, 1.0V	11.0	11.0	7.0
MWSA0412-R33MT	0.33	100k, 1.0V	19	8.4	6.5
MWSA0412-R47MT	0.47	100k, 1.0V	21	6.8	6.0
MWSA0412-R68MT	0.68	100k, 1.0V	36	6.0	4.7
MWSA0412-1R0MT	1.0	100k, 1.0V	47	5.5	4.5
MWSA0412-1R5MT	1.5	100k, 1.0V	75	4.0	3.25
MWSA0412-2R2MT	2.2	100k, 1.0V	83.5	3.0	2.75
MWSA0412-4R7MT	4.7	100k, 1.0V	195	2.2	1.8

### MWSA0402 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA0402-R10MT	0.10	100k, 1.0V	4.0	22.0	13.0
MWSA0402-R22MT	0.22	100k, 1.0V	6.6	12.5	9.5
MWSA0402-R33MT	0.33	100k, 1.0V	11.0	12.0	10.0
MWSA0402-R47MT	0.47	100k, 1.0V	14	9.5	7.5
MWSA0402-R56MT	0.56	100k, 1.0V	16	9.0	7.0
MWSA0402-R68MT	0.68	100k, 1.0V	18	8.0	7.0
MWSA0402-1R0MT	1.0	100k, 1.0V	27	7.0	6.0
MWSA0402-1R2MT	1.2	100k, 1.0V	27	6.5	6.0
MWSA0402-1R5MT	1.5	100k, 1.0V	46	5.5	5.0
MWSA0402-2R2MT	2.2	100k, 1.0V	58	5.0	4.5
MWSA0402-3R3MT	3.3	100k, 1.0V	87	3.5	3.3
MWSA0402-4R7MT	4.7	100k, 1.0V	105	3.0	2.8
MWSA0402-6R8MT	6.8	100k, 1.0V	175	2.5	2.4
MWSA0402-100MT	10.0	100k, 1.0V	282	2.0	1.6
MWSA0402-220MT	22.0	100k, 1.0V	363	1.4	1.2

### MWSA0518 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA0518-R47MT	0.47	100k, 1.0V	9	12.0	10.5
MWSA0518-R56MT	0.56	100k, 1.0V	10	11	9.5
MWSA0518-1R0MT	1.0	100k, 1.0V	17	9.0	8.0
MWSA0518-1R5MT	1.5	100k, 1.0V	26	8	7.5



MWSA0518-2R2MT	2.2	100k, 1.0V	35	6.0	5.0
MWSA0518-3R3MT	3.3	100k, 1.0V	58	4.8	4.5
MWSA0518-4R7MT	4.7	100k, 1.0V	85	4.0	3.5
MWSA0518-6R8MT	6.8	100k, 1.0V	120	3.4	2.8
MWSA0518-100MT	10.0	100k, 1.0V	155	2.5	2.5

**MWSA0503 TYPE**

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA0503-R10MT	0.1	100k, 1.0V	3.0	30	25
MWSA0503-R20MT	0.2	100k, 1.0V	3.9	20	14
MWSA0503-R33MT	0.33	100k, 1.0V	5.5	18	14
MWSA0503-R47MT	0.47	100k, 1.0V	8.5	15	11
MWSA0503-R68MT	0.68	100k, 1.0V	12.0	11.5	9.0
MWSA0503-1R0MT	1.0	100k, 1.0V	14	10	8.5
MWSA0503-1R2MT	1.2	100k, 1.0V	16	9.5	8.5
MWSA0503-1R5MT	1.5	100k, 1.0V	25	9	8.2
MWSA0503-2R2MT	2.2	100k, 1.0V	29	7.0	7.0
MWSA0503-3R3MT	3.3	100k, 1.0V	38	6.0	5.5
MWSA0503-4R7MT	4.7	100k, 1.0V	60	4.6	4.5
MWSA0503-6R8MT	6.8	100k, 1.0V	90	3.6	3.5
MWSA0503-100MT	10.0	100k, 1.0V	125	3.5	3.2

**MWSA0618 TYPE**

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA0618-R10MT	0.10	100k, 1.0V	2.3	38	25
MWSA0618-R22MT	0.22	100k, 1.0V	3.5	24	22
MWSA0618-R47MT	0.47	100k, 1.0V	8.4	18.0	11.5
MWSA0618-R68MT	0.68	100k, 1.0V	12	16.5	9.5
MWSA0618-1R0MT	1.0	100k, 1.0V	16	12	8.5
MWSA0618-1R5MT	1.5	100k, 1.0V	26	9.2	8
MWSA0618-2R2MT	2.2	100k, 1.0V	35	8	7
MWSA0618-3R3MT	3.3	100k, 1.0V	50	6.0	4.5
MWSA0618-4R7MT	4.7	100k, 1.0V	62	5.0	4.0
MWSA0618-6R8MT	6.8	100k, 1.0V	110	4.5	3.0
MWSA0618-100MT	10	100k, 1.0V	155	4.0	2.3
MWSA0618-220MT	22	100k, 1.0V	350	2.3	1.8

**MWSA0624 TYPE**

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA0624-R22MT	0.22	100k, 1.0V	3.0	30	21
MWSA0624-R33MT	0.33	100k, 1.0V	4.1	24.5	18
MWSA0624-R47MT	0.47	100k, 1.0V	5.1	20	15
MWSA0624-R56MT	0.56	100k, 1.0V	6.5	17	13
MWSA0624-R68MT	0.68	100k, 1.0V	7.0	16	12
MWSA0624-1R0MT	1.0	100k, 1.0V	13.5	15	9.0
MWSA0624-1R5MT	1.5	100k, 1.0V	20	13.5	8.2
MWSA0624-2R2MT	2.2	100k, 1.0V	28	10	7.0
MWSA0624-3R3MT	3.3	100k, 1.0V	39	8	5.5
MWSA0624-4R7MT	4.7	100k, 1.0V	50	6.5	5.0
MWSA0624-6R8MT	6.8	100k, 1.0V	70	6.0	4.0
MWSA0624-100MT	10.0	100k, 1.0V	101	4.0	3.1
MWSA0624-150MT	15.0	100k, 1.0V	160	3.3	2.5
MWSA0624-220MT	22.0	100k, 1.0V	230	2.5	2.0

## MWSA0603 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA0603-R22MT	0.22	100k, 1.0V	3.0	34	24
MWSA0603-R24MT	0.24	100k, 1.0V	3.1	26	23
MWSA0603-R33MT	0.33	100k, 1.0V	3.5	25	21
MWSA0603-R47MT	0.47	100k, 1.0V	4.1	19	18
MWSA0603-R56MT	0.56	100k, 1.0V	4.5	18	16.5
MWSA0603-R68MT	0.68	100k, 1.0V	5.3	17	16
MWSA0603-R82MT	0.82	100k, 1.0V	6.0	16	14
MWSA0603-1R0MT	1.0	100k, 1.0V	7.4	14	12
MWSA0603-1R5MT	1.5	100k, 1.0V	12.1	12	12
MWSA0603-2R2MT	2.2	100k, 1.0V	15	10	9.5
MWSA0603-3R3MT	3.3	100k, 1.0V	22	9.5	8.5
MWSA0603-4R7MT	4.7	100k, 1.0V	33	6.2	6
MWSA0603-6R8MT	6.8	100k, 1.0V	48	5.5	5
MWSA0603-8R2MT	8.2	100k, 1.0V	60	5.5	5
MWSA0603-100MT	10	100k, 1.0V	67	5.2	4.5
MWSA0603-150MT	15	100k, 1.0V	115	4.0	3.0
MWSA0603-220MT	22	100k, 1.0V	200	3.0	2.3
MWSA0603-330MT	33	100k, 1.0V	310	2.5	2.0

## MWSA1004 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA1004-R15MT	0.15	100k, 1.0V	0.65	75	45
MWSA1004-R22MT	0.22	100k, 1.0V	1.0	60	35
MWSA1004-R30MT	0.30	100k, 1.0V	1.1	45	35
MWSA1004-R36MT	0.36	100k, 1.0V	1.2	45	30
MWSA1004-R47MT	0.47	100k, 1.0V	1.7	40	30
MWSA1004-R56MT	0.56	100k, 1.0V	1.8	33	25
MWSA1004-R68MT	0.68	100k, 1.0V	2.4	30	23
MWSA1004-R80MT	0.80	100k, 1.0V	2.7	29	23
MWSA1004-1R0MT	1.0	100k, 1.0V	3.3	28	19
MWSA1004-1R5MT	1.5	100k, 1.0V	4.2	24	16
MWSA1004-2R2MT	2.2	100k, 1.0V	7.0	16.5	12
MWSA1004-3R3MT	3.3	100k, 1.0V	11.8	16	11
MWSA1004-4R7MT	4.7	100k, 1.0V	20	13	9.0
MWSA1004-6R8MT	6.8	100k, 1.0V	25	12	8.5
MWSA1004-8R2MT	8.2	100k, 1.0V	27	9	8.0
MWSA1004-100MT	10	100k, 1.0V	30	8.5	7.8
MWSA1004-150MT	15	100k, 1.0V	45	7	6.5
MWSA1004-220MT	22	100k, 1.0V	66	5.5	5.0
MWSA1004-330MT	33	100k, 1.0V	92	4.8	4.4
MWSA1004-470MT	47	100k, 1.0V	145	3.5	3.3
MWSA1004-680MT	68	100k, 1.0V	195	3	2.5

## MWSA1205 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Typ. Saturation Current	Typ. Heat Rating Current
Units	μH	Hz, V	mΩ	A	A
Symbol	L	-	DCR	Isat	Irms
MWSA1205-R22MT	0.22	100k, 1.0V	0.7	75	50
MWSA1205-R36MT	0.36	100k, 1.0V	0.85	50	42
MWSA1205-R50MT	0.50	100k, 1.0V	1.15	48	38
MWSA1205-R68MT	0.68	100k, 1.0V	1.55	46	33
MWSA1205-R82MT	0.82	100k, 1.0V	1.67	39	30

MWSA1205-1R0MT	1.0	100k, 1.0V	2.2	35	26
MWSA1205-1R5MT	1.5	100k, 1.0V	3.2	33	23
MWSA1205-2R2MT	2.2	100k, 1.0V	5.0	24	15
MWSA1205-3R3MT	3.3	100k, 1.0V	7	22	14
MWSA1205-4R7MT	4.7	100k, 1.0V	9	20	13
MWSA1205-6R8MT	6.8	100k, 1.0V	18	16	12
MWSA1205-100MT	10	100k, 1.0V	22	12	9
MWSA1205-150MT	15	100k, 1.0V	30	10	8
MWSA1205-220MT	22	100k, 1.0V	58	6.5	4.5
MWSA1205-330MT	33	100k, 1.0V	84	6.0	3.5
MWSA1205-470MT	47	100k, 1.0V	130	5.0	3.0





### Performance Graphs






#### Test Instruments

Wayne kerr 3260B/G LCR Meter  
Wayne kerr 3265B Bias Current Source

#### Test Condition

Temperature:  $26 \pm 3^{\circ}\text{C}$   
Humidity: < 70% RH  
Frequency: 100 KHz, 1.0V

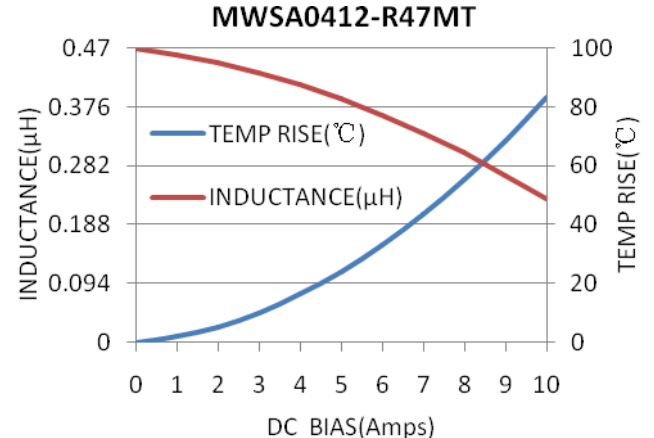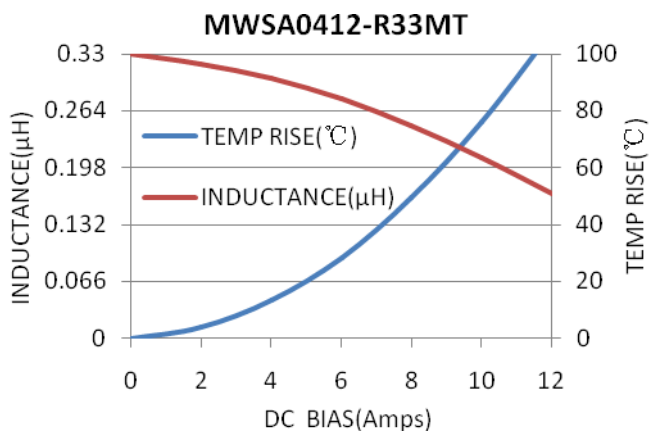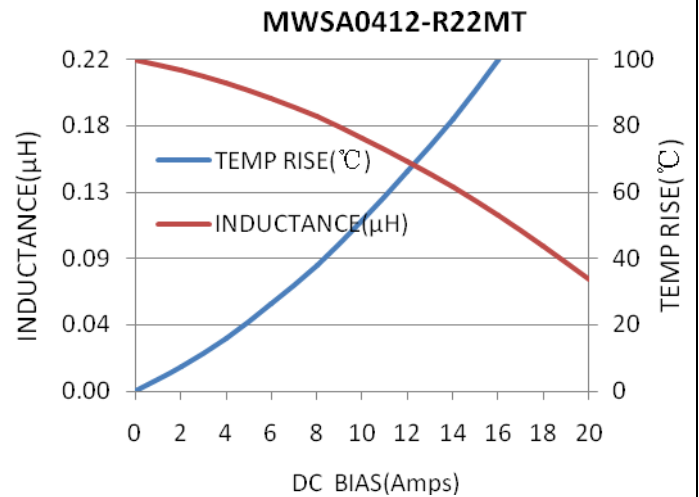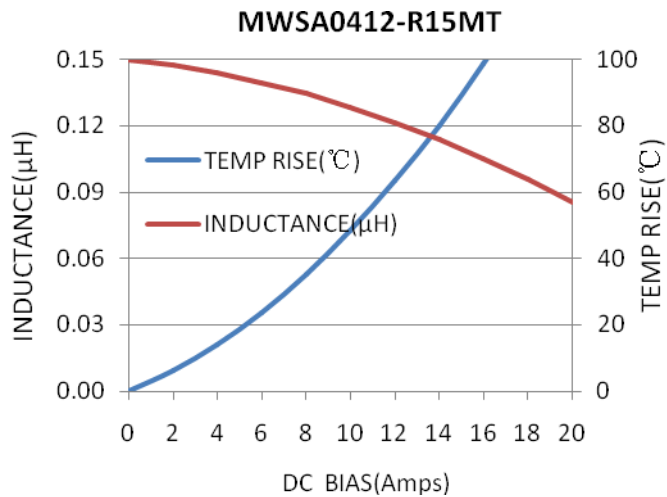

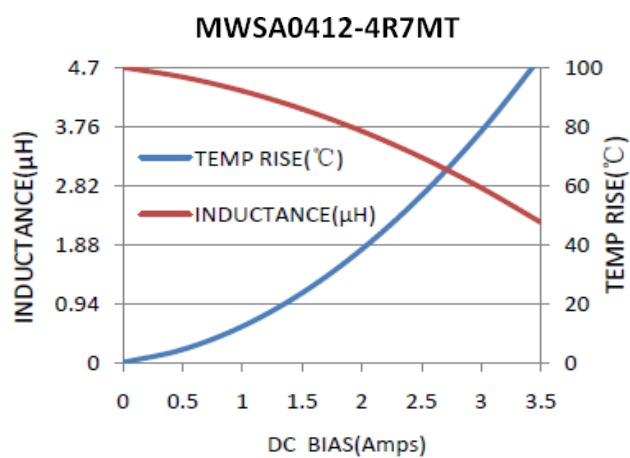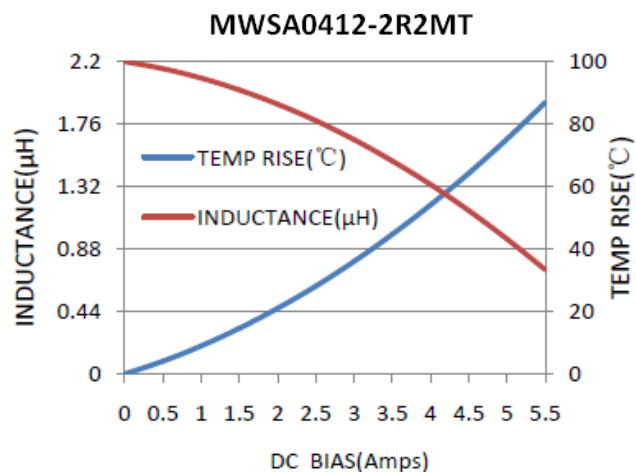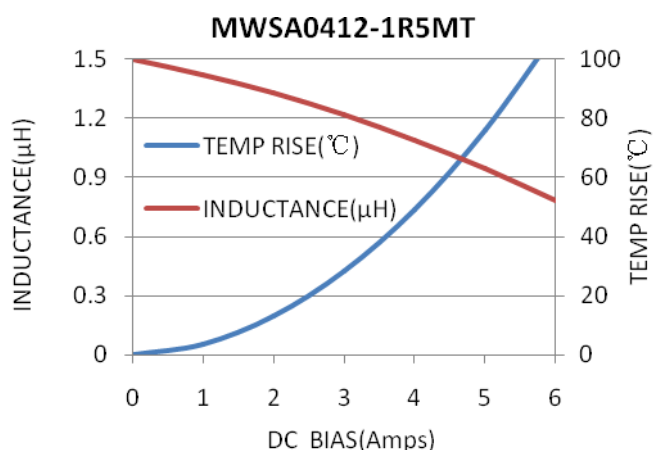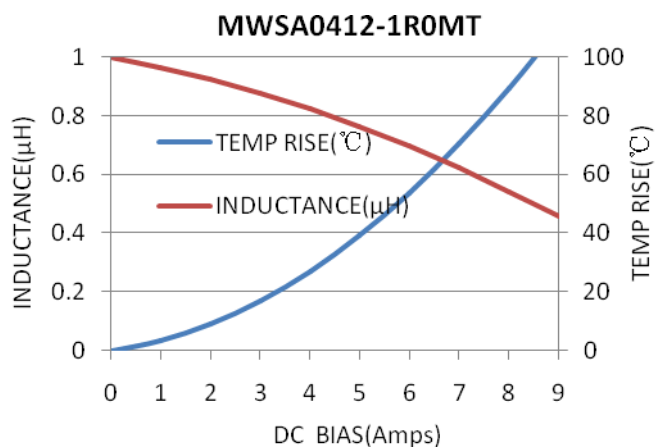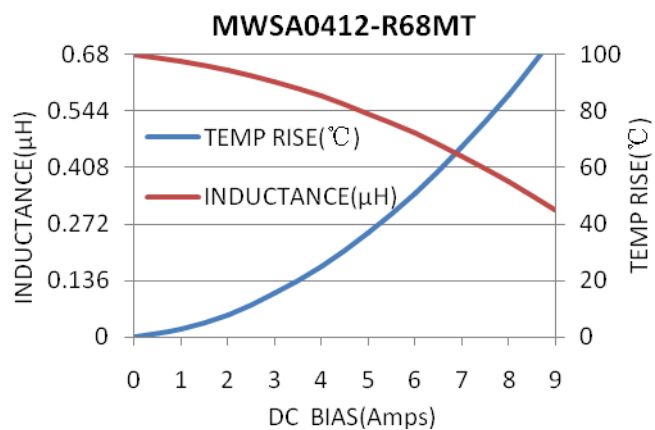









## Performance Graphs


## Test Instruments

Wayne kerr 3260B/G LCR Meter  
Wayne kerr 3265B Bias Current Source

## Test Condition

Temperature:  $26 \pm 3^{\circ}\text{C}$   
Humidity: < 70% RH  
Frequency: 100 KHz, 1.0V

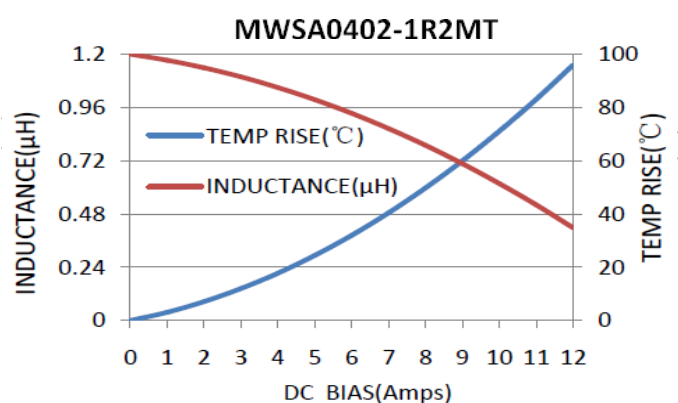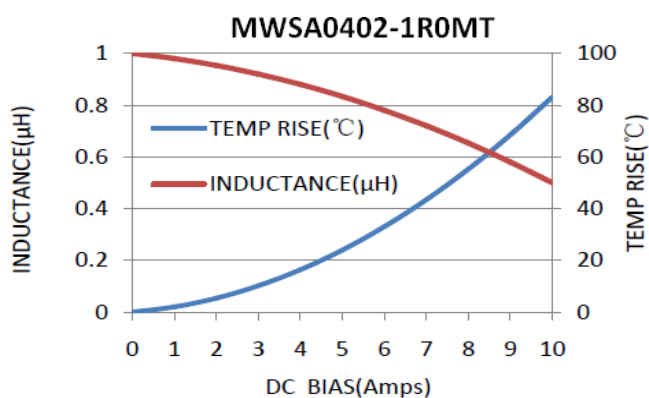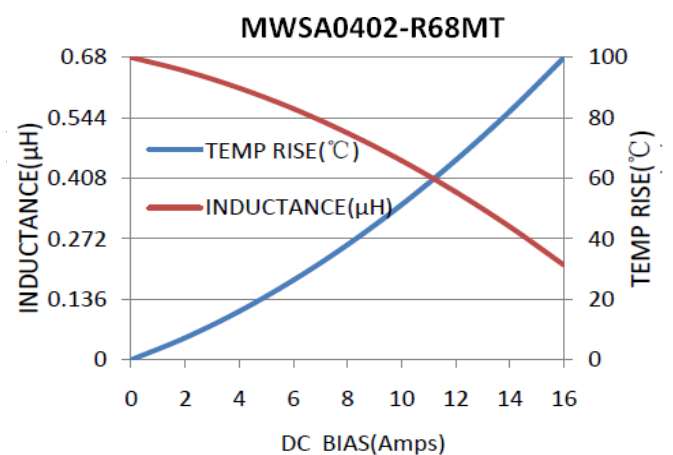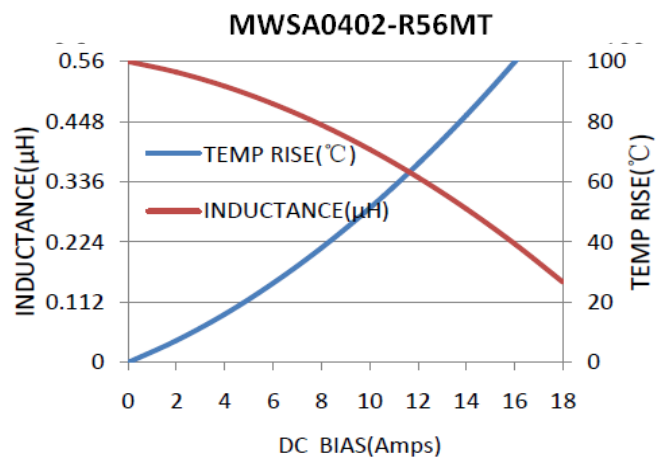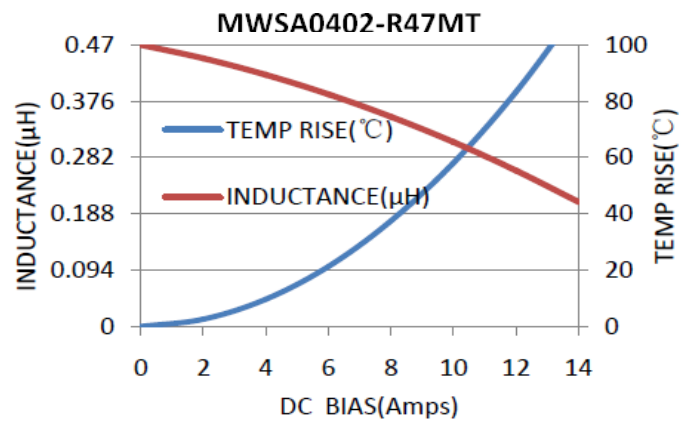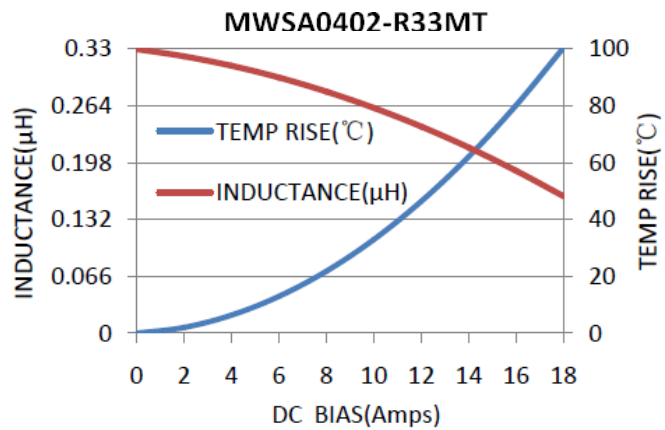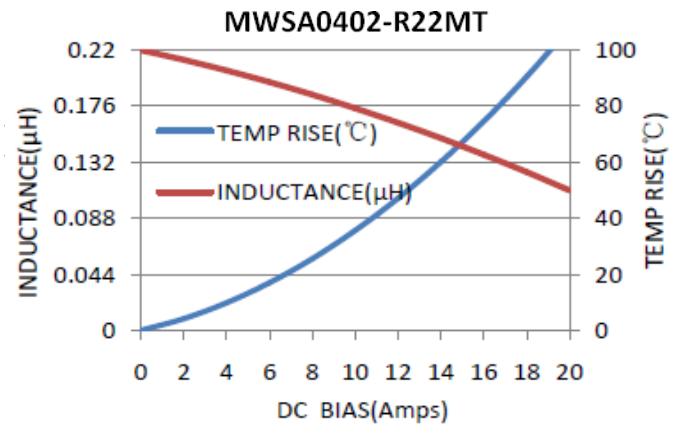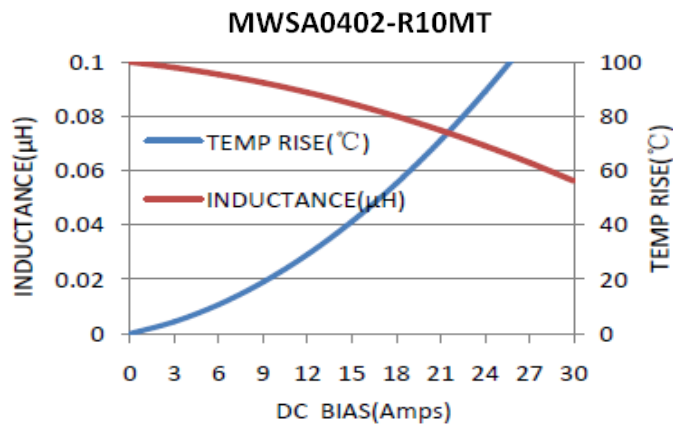

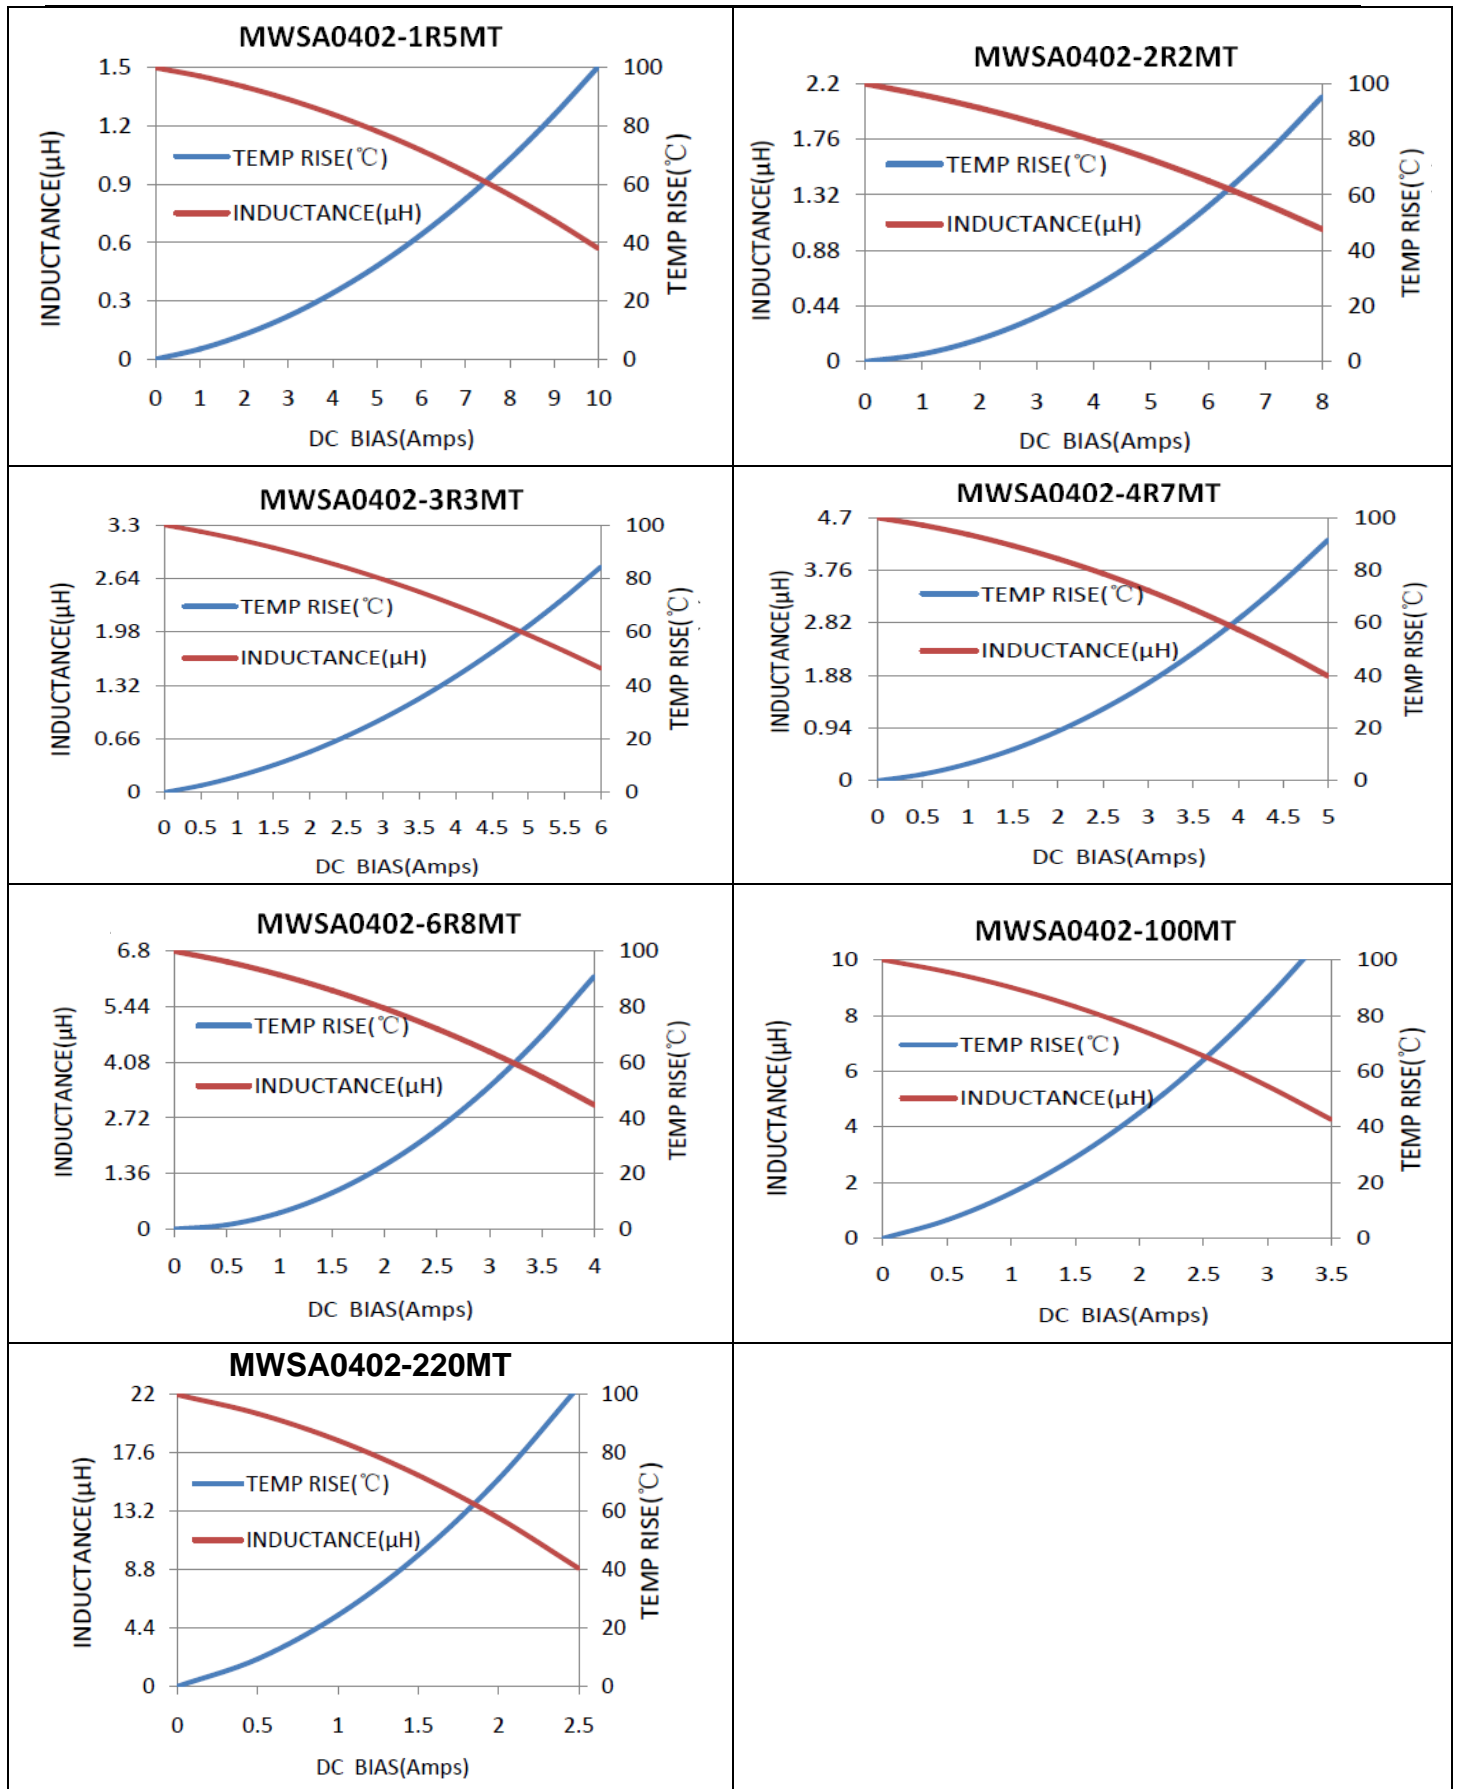

## Performance Graphs

## Test Instruments

Wayne kerr 3260B/G LCR Meter

Wayne kerr 3265B Bias Current Source


## Test Condition

Temperature:  $26 \pm 3^{\circ}\text{C}$ 


Humidity: &lt; 70% RH

Frequency: 100 KHz, 1.0V


MWSA0518-R47MT

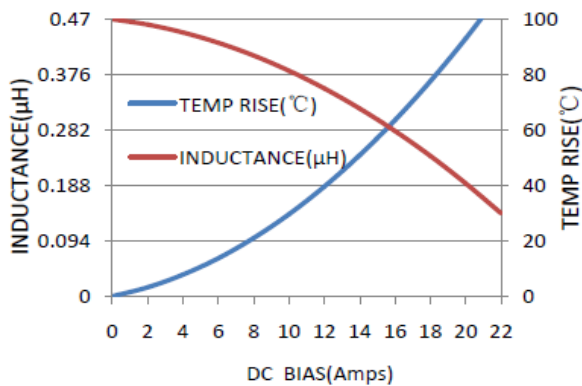


MWSA0518-R56MT

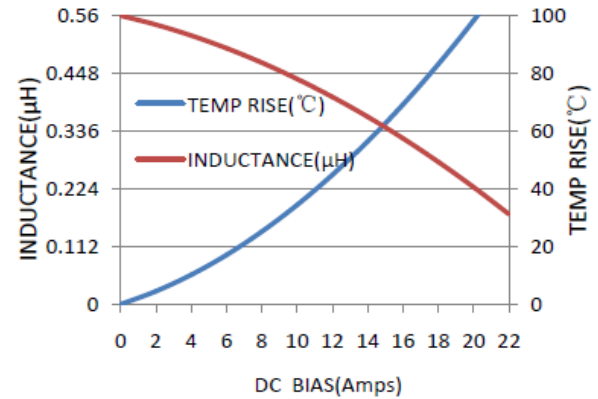


MWSA0518-1R0MT

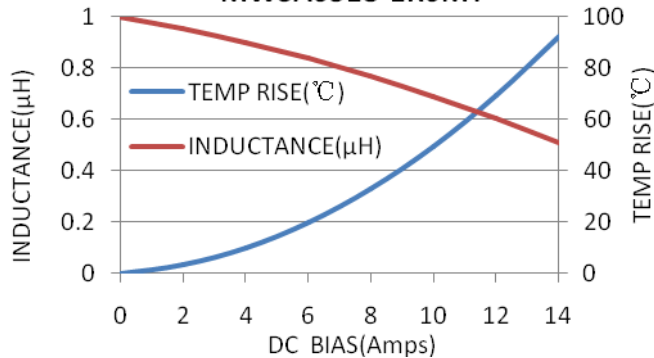


MWSA0518-1R5MT

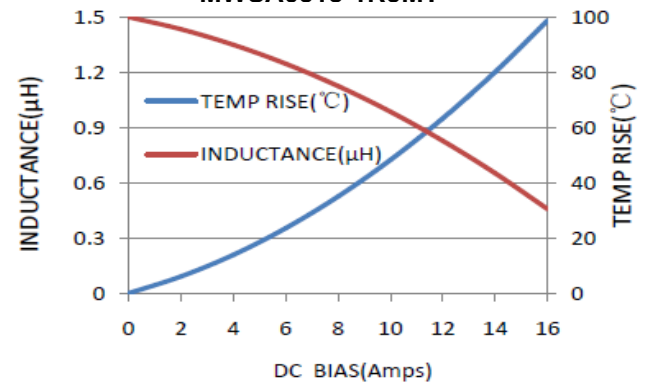


MWSA0518-2R2MT

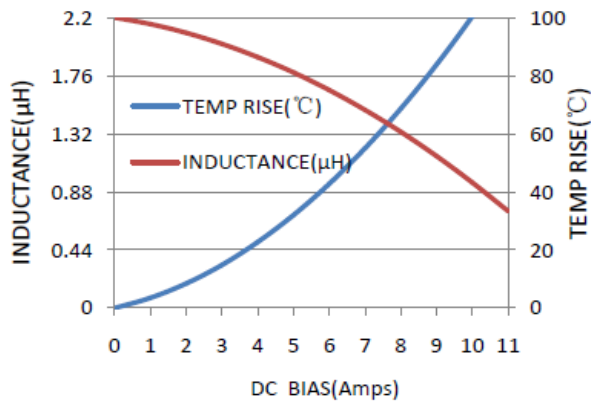


MWSA0518-3R3MT

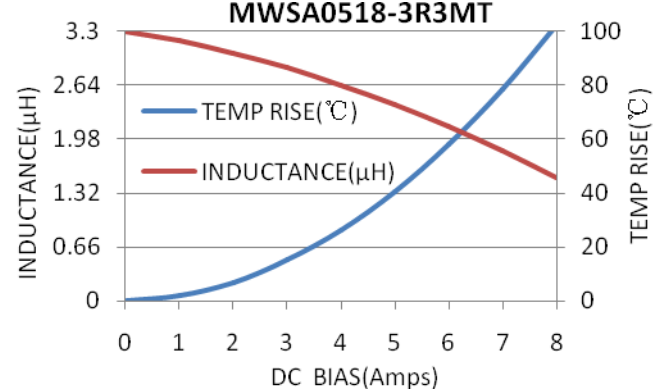


MWSA0518-4R7MT

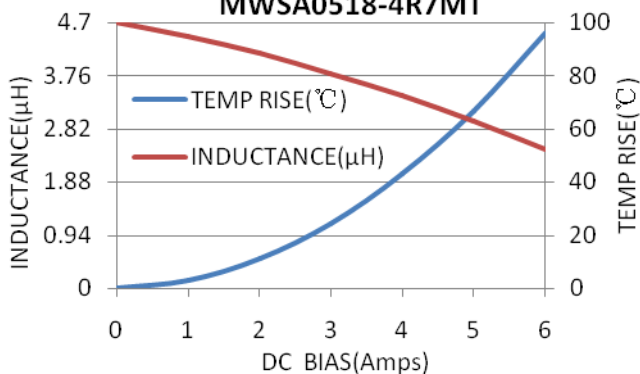

MWSA0518-6R8MT

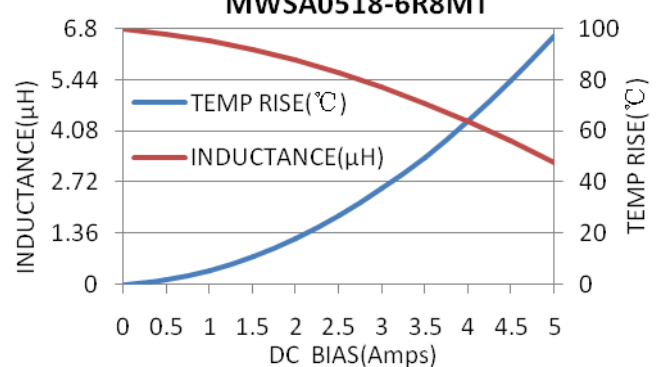

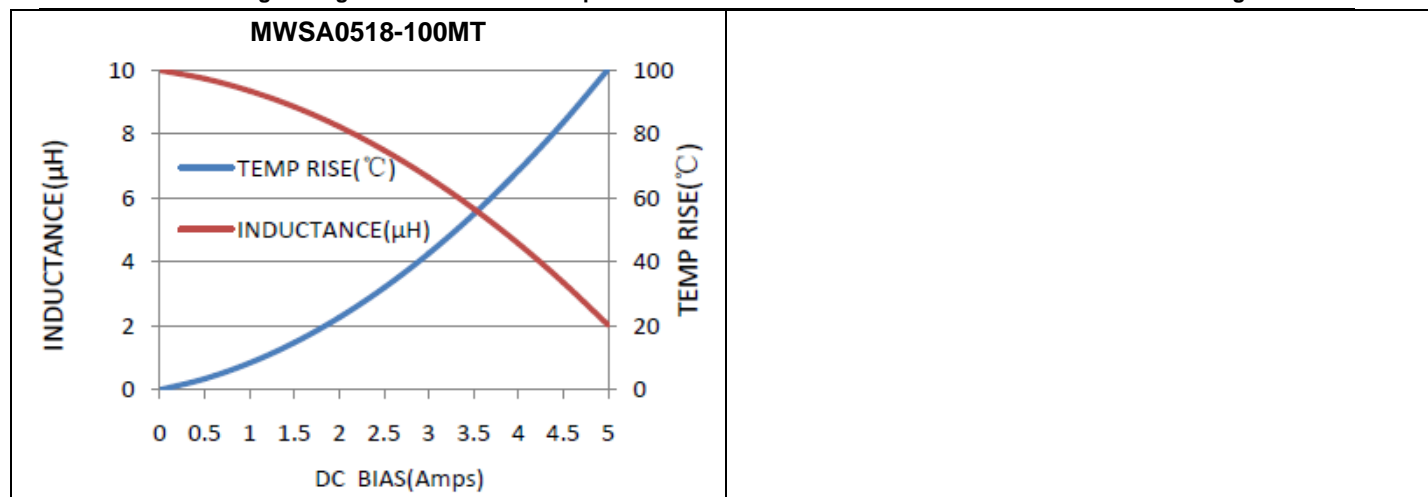

**Performance Graphs****Test Instruments**


Wayne kerr 3260B/G LCR Meter

Wayne kerr 3265B Bias Current Source

**Test Condition**Temperature:  $26 \pm 3^{\circ}\text{C}$ 


Humidity: &lt; 70% RH

Frequency: 100 KHz, 1.0V

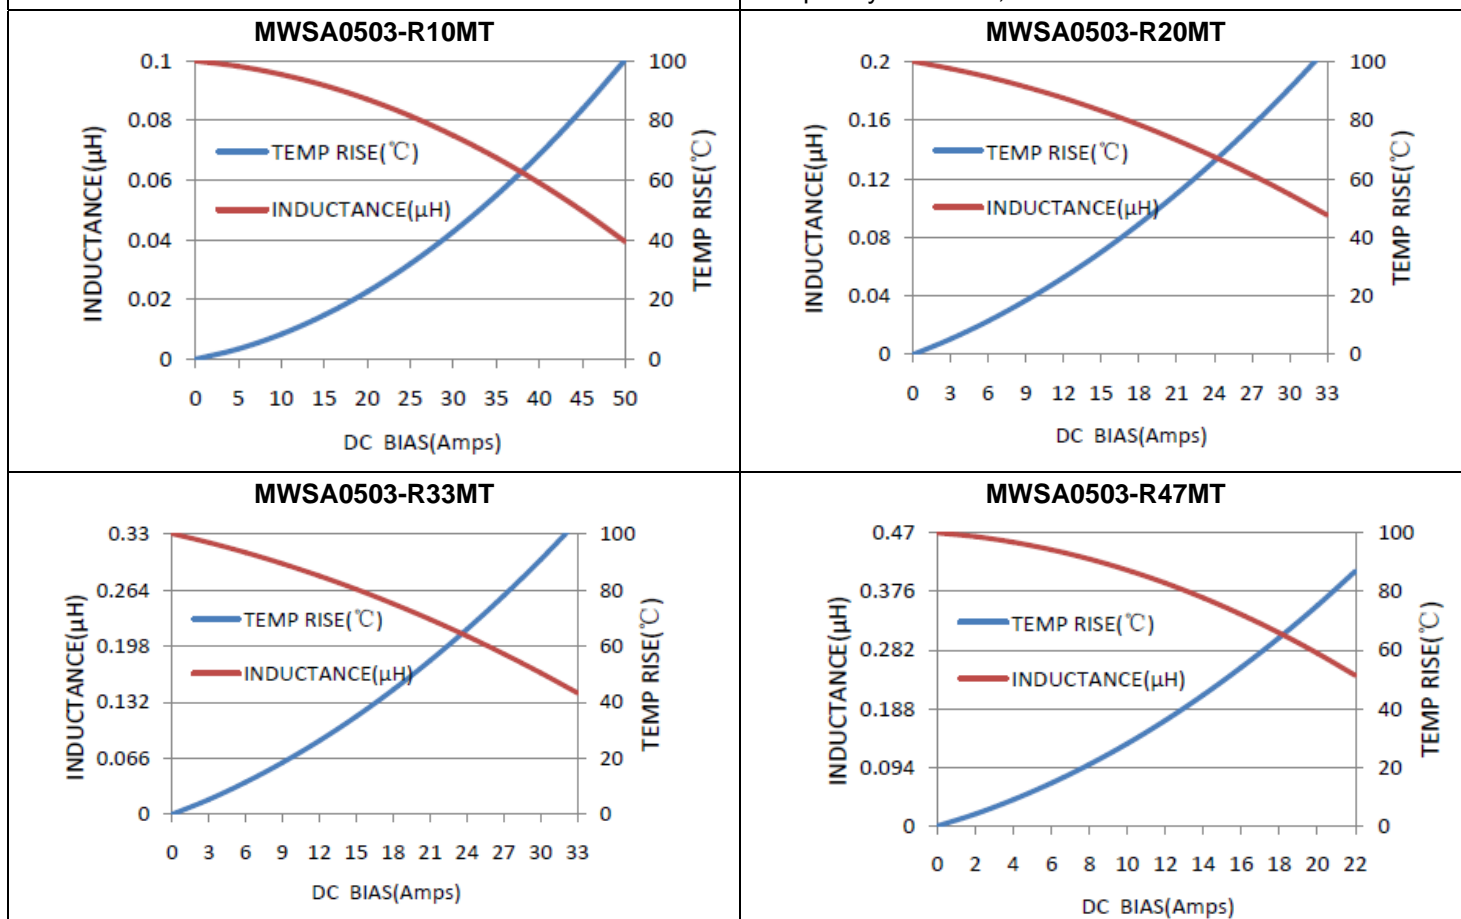





MWSA0503-R68MT

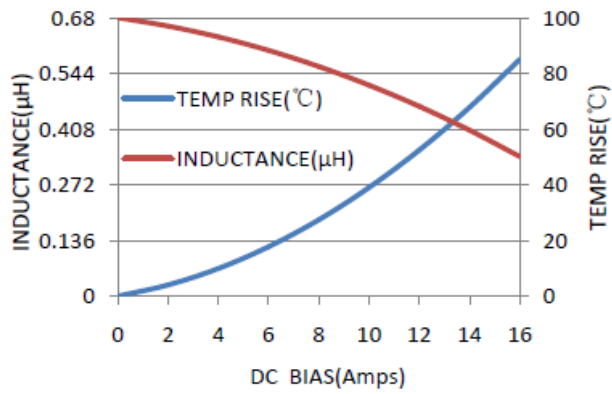


MWSA0503-1R0MT

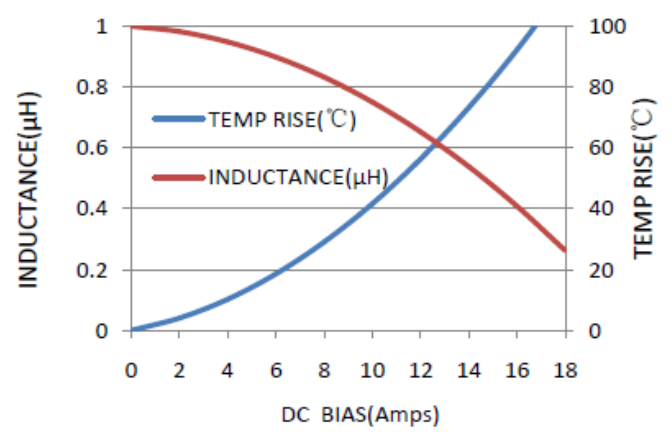


MWSA0503-1R2MT

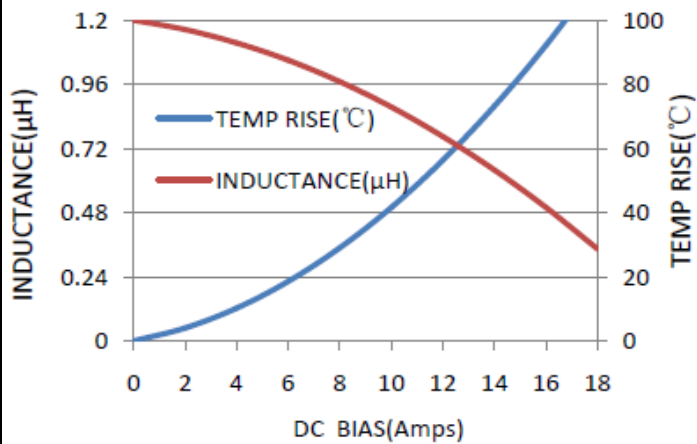


MWSA0503-1R5MT

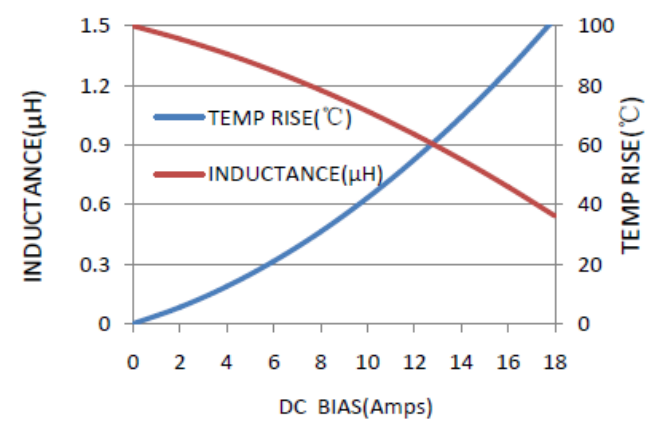


MWSA0503-2R2MT

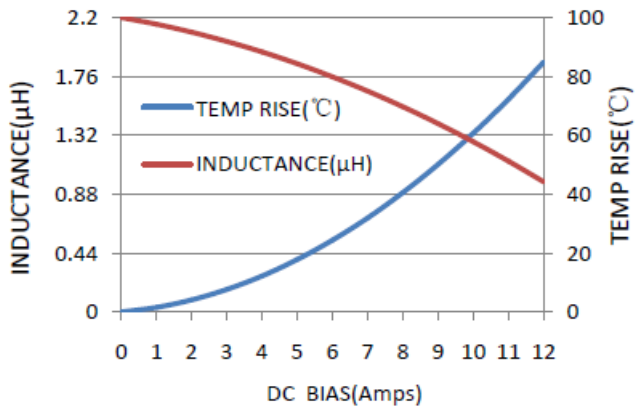


MWSA0503-3R3MT

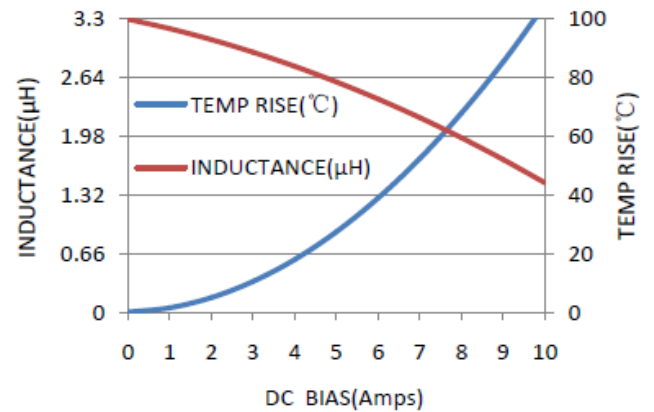


MWSA0503-4R7MT

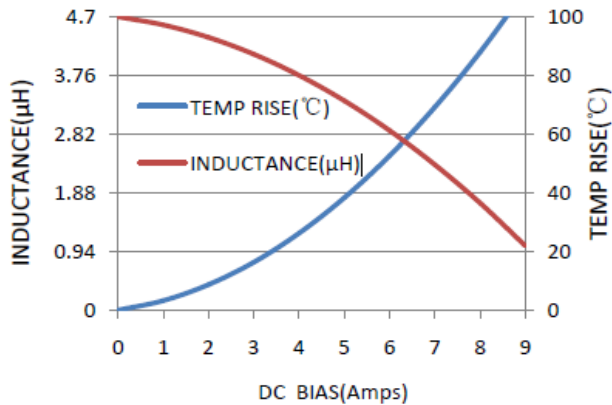

MWSA0503-6R8MT

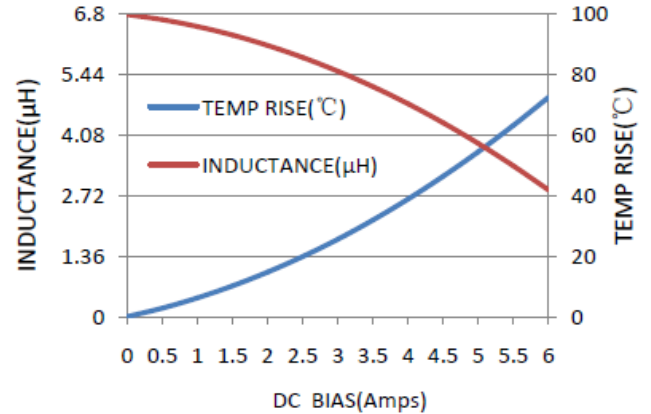

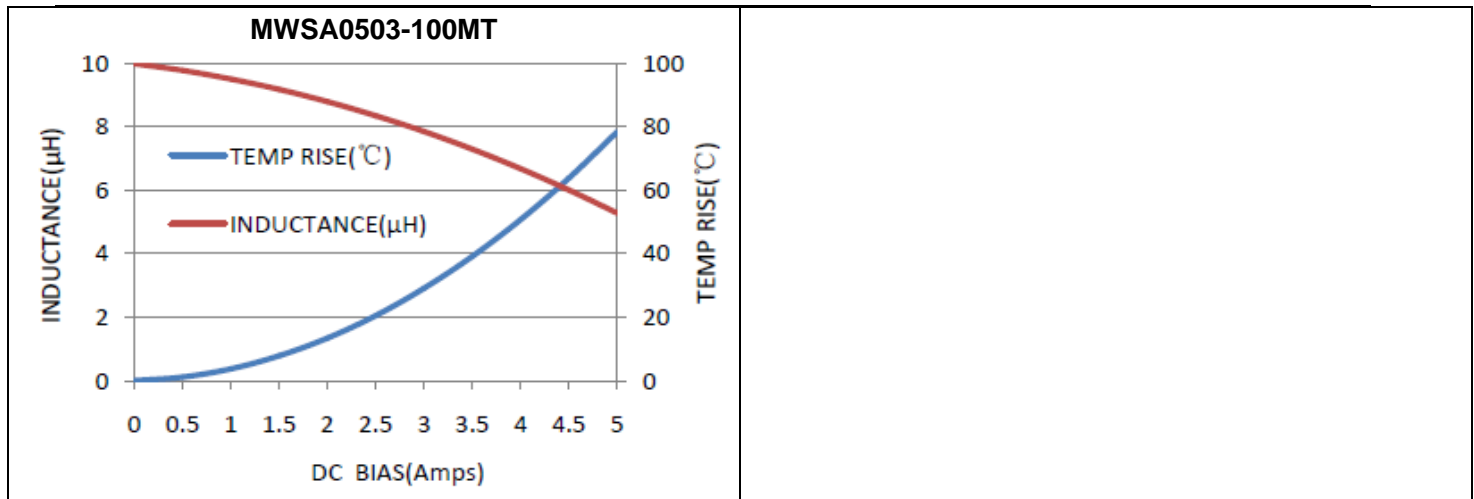

### Performance Graphs

#### Test Instruments

Wayne kerr 3260B/G LCR Meter


Wayne kerr 3265B Bias Current Source


#### Test Condition

Temperature:  $26 \pm 3^{\circ}\text{C}$ 

Humidity: &lt; 70% RH

Frequency: 100 KHz, 1.0V

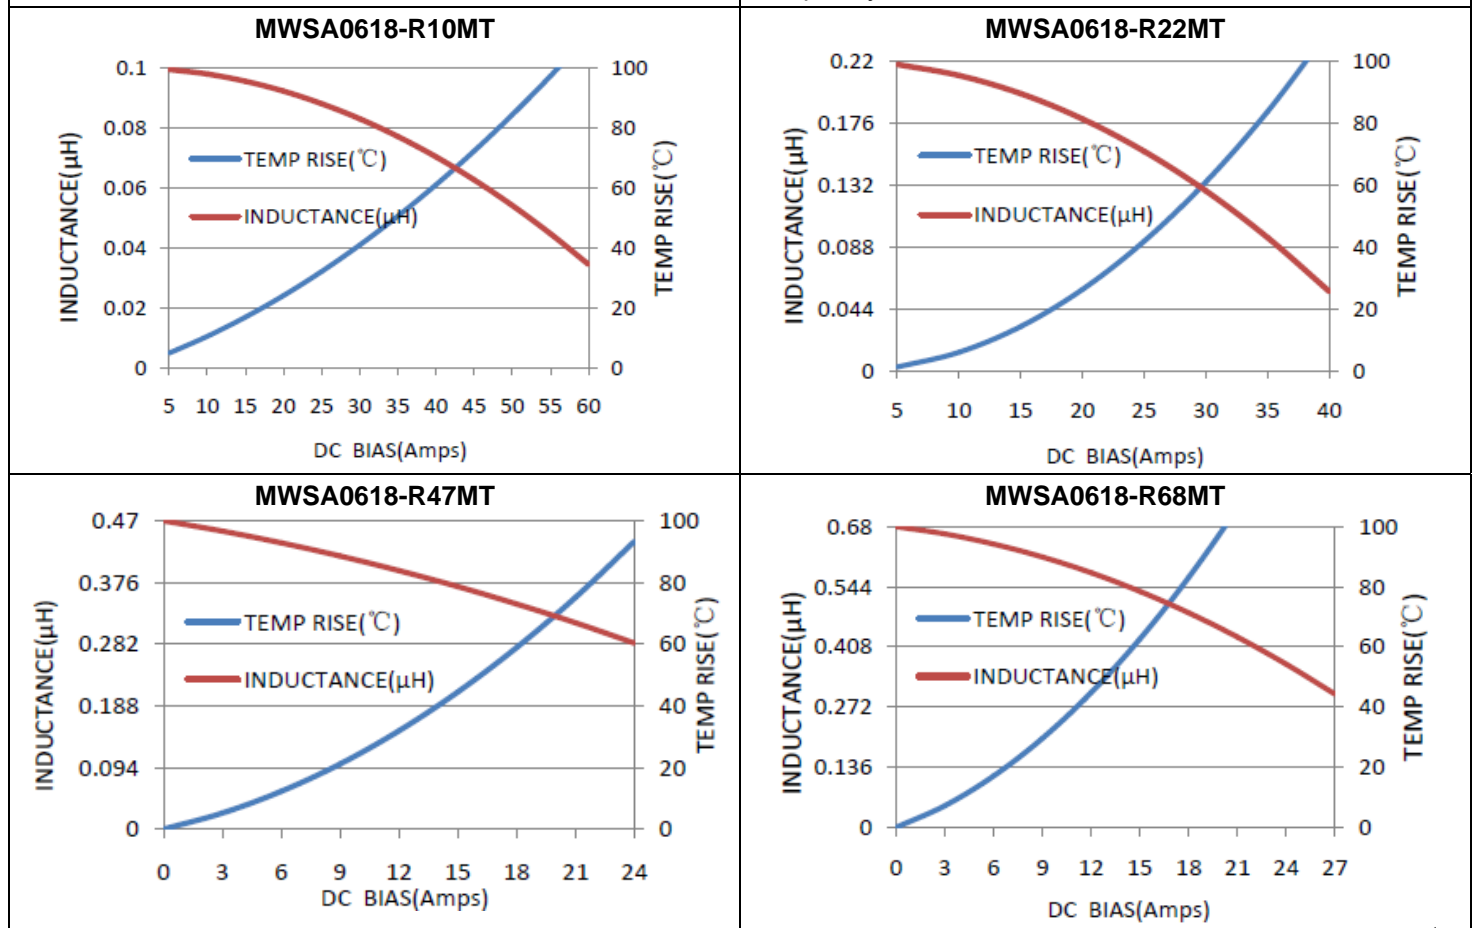

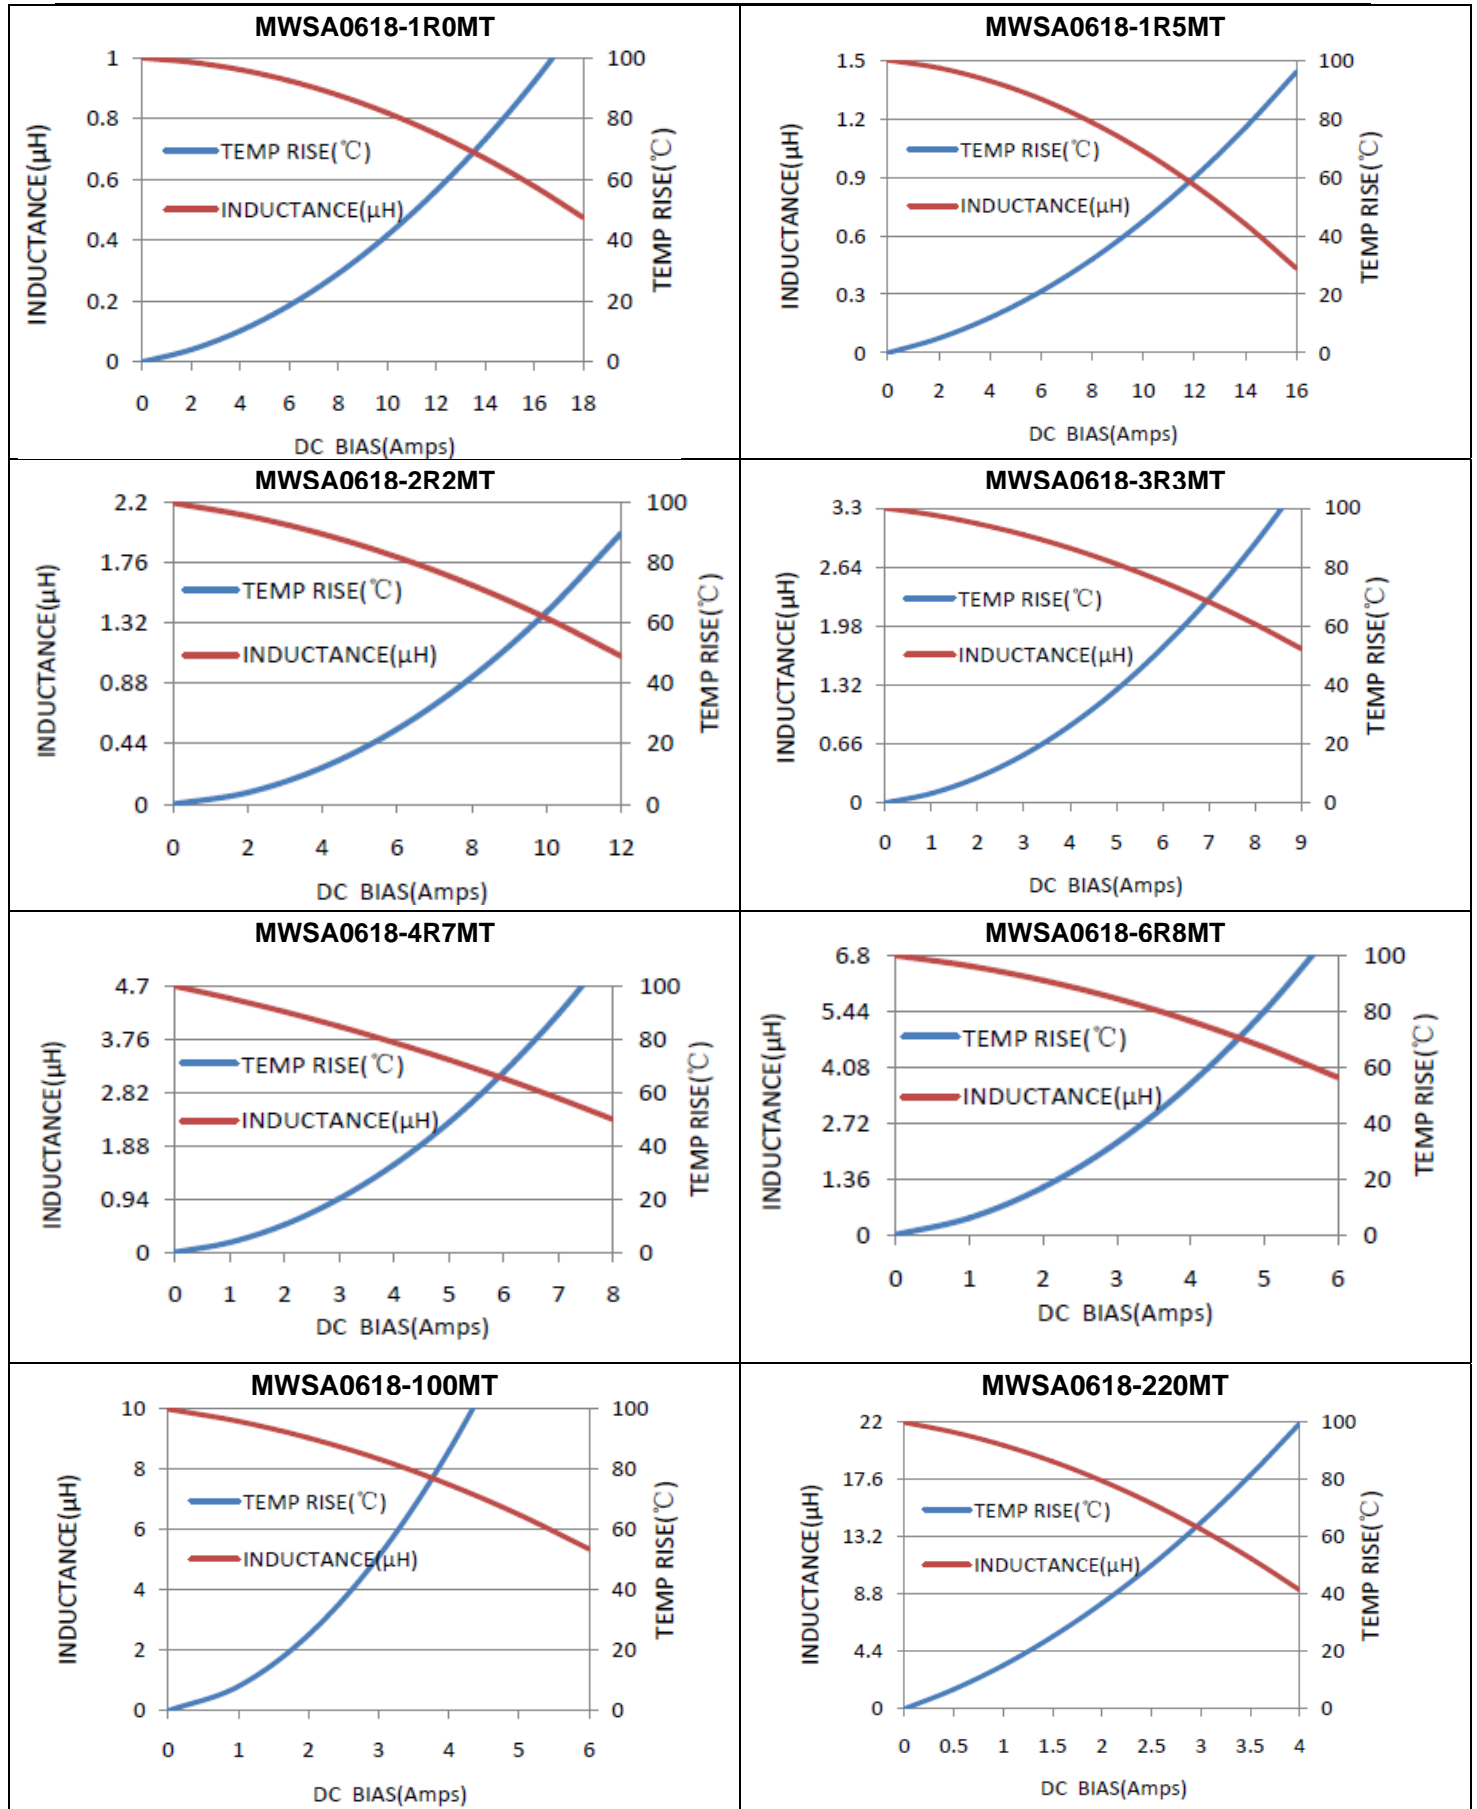

## Performance Graphs

## Test Instruments

Wayne kerr 3260B/G LCR Meter

Wayne kerr 3265B Bias Current Source


## Test Condition

Temperature:  $26 \pm 3^{\circ}\text{C}$ 


Humidity: &lt; 70% RH

Frequency: 100 KHz, 1.0V


MWSA0624-R22MT

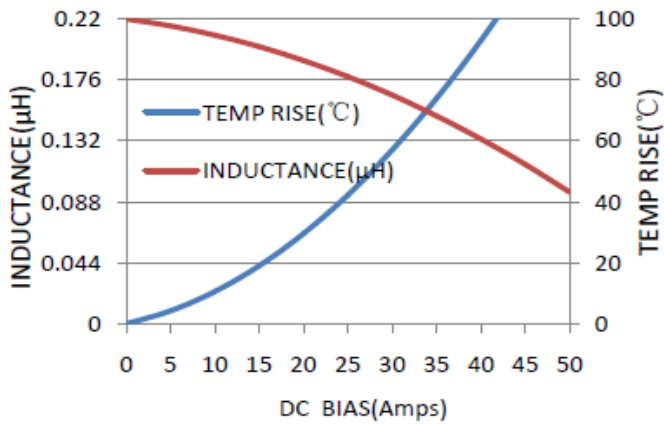


MWSA0624-R33MT

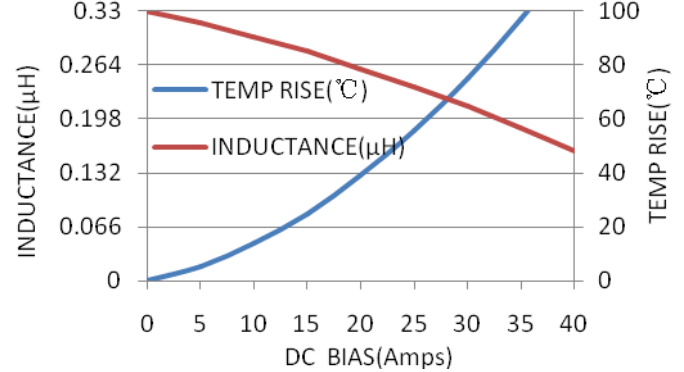


MWSA0624-R47MT

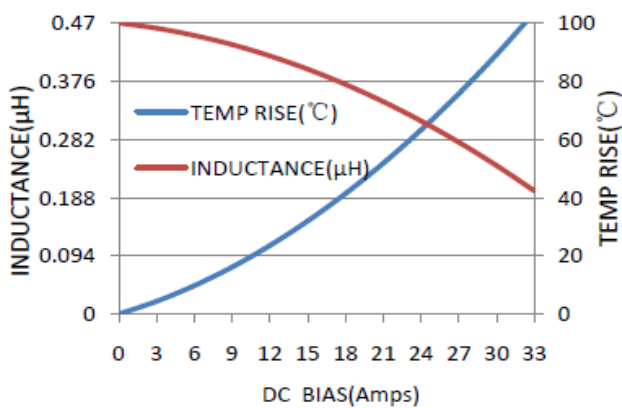


MWSA0624-R56MT

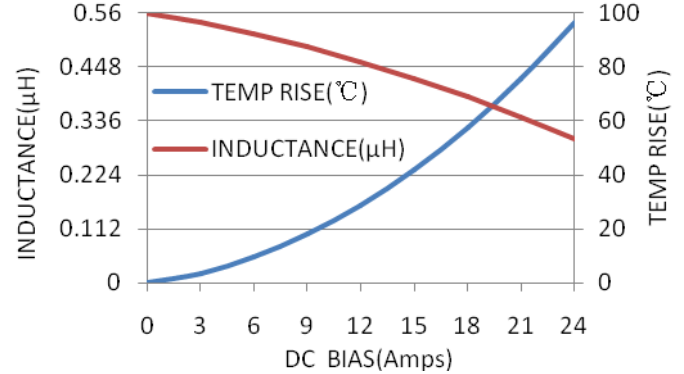


MWSA0624-R68MT

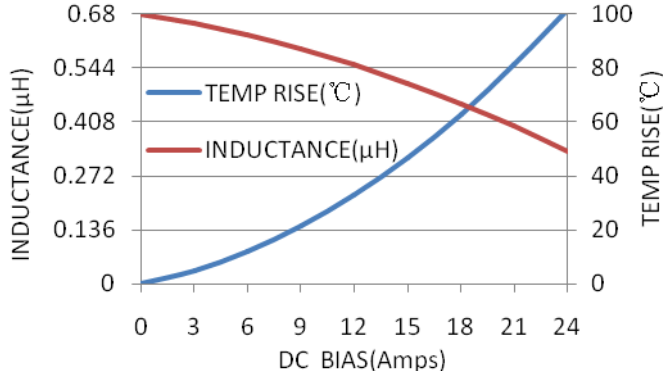


MWSA0624-1R0MT

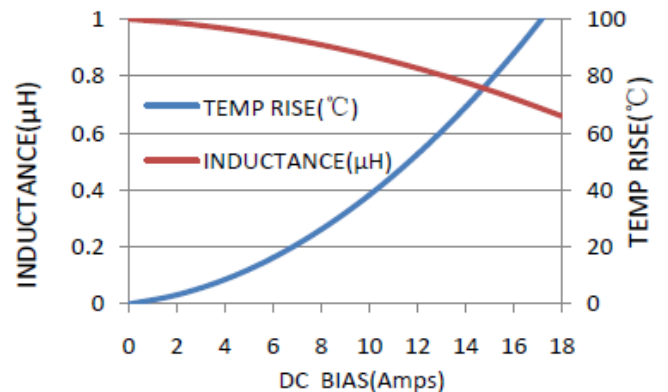


MWSA0624-1R5MT

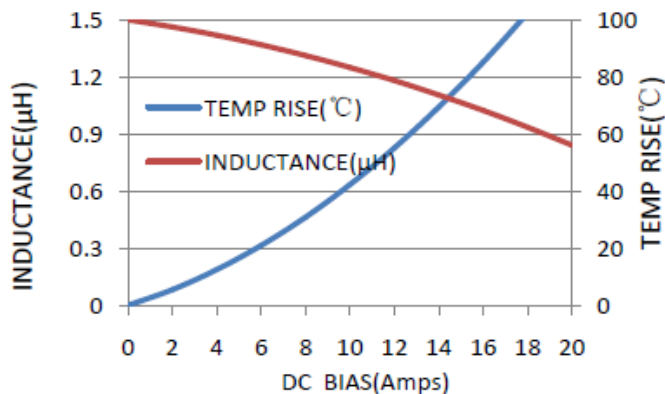


MWSA0624-2R2MT

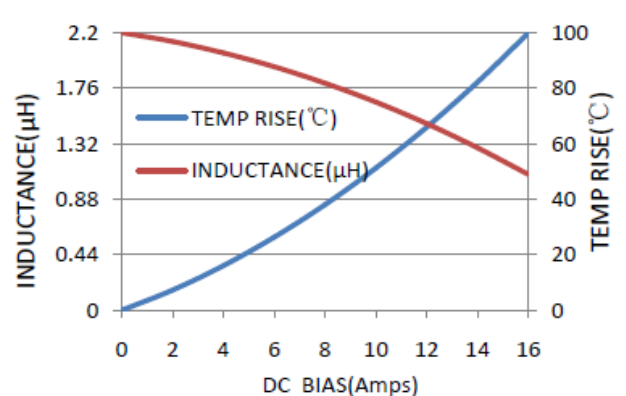


MWSA0624-3R3MT

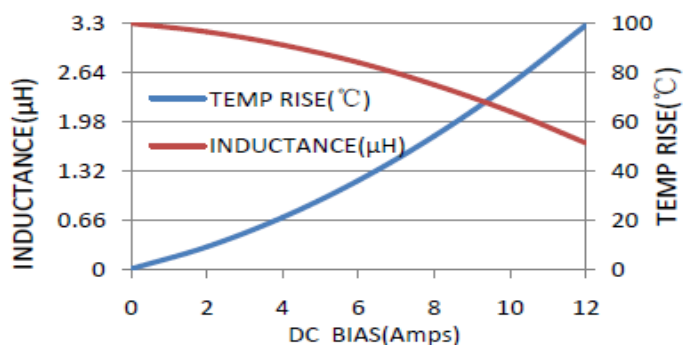


MWSA0624-4R7MT

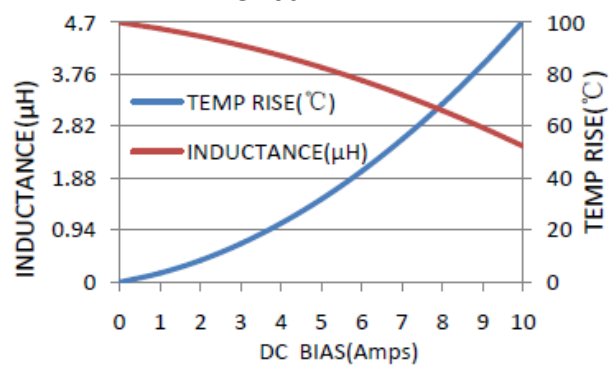


MWSA0624-6R8MT

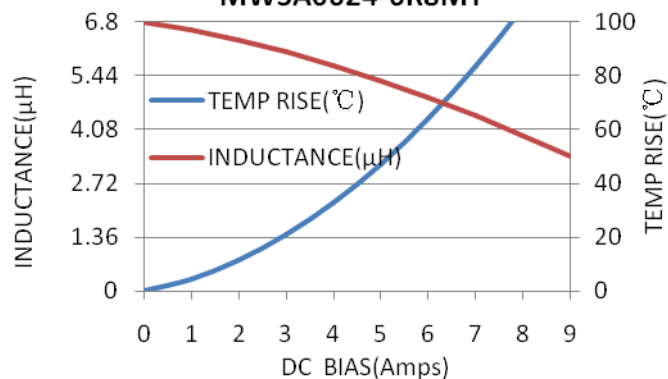


MWSA0624-100MT

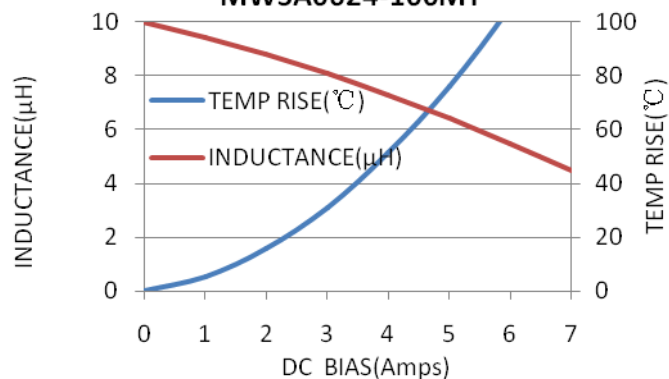

MWSA0624-150MT

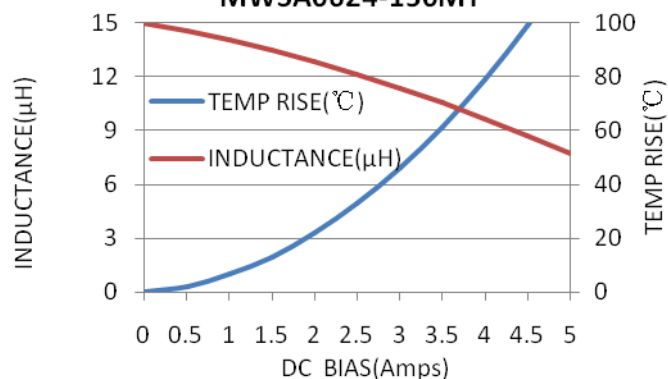

MWSA0624-220MT

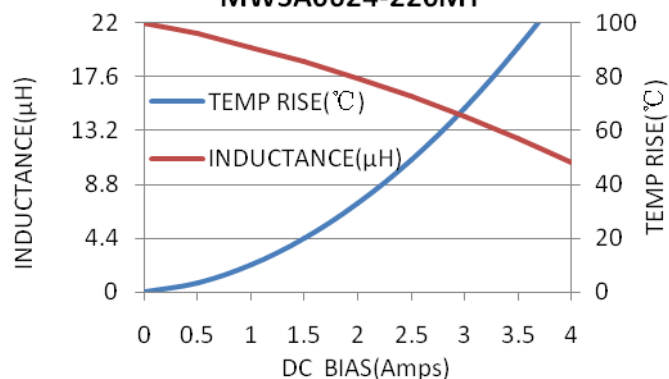

## Performance Graphs

## Test Instruments

Wayne kerr 3260B/G LCR Meter

Wayne kerr 3265B Bias Current Source


## Test Condition

Temperature:  $26 \pm 3^{\circ}\text{C}$ 


Humidity: &lt; 70% RH

Frequency: 100 KHz, 1.0V


MWSA0603-R22MT

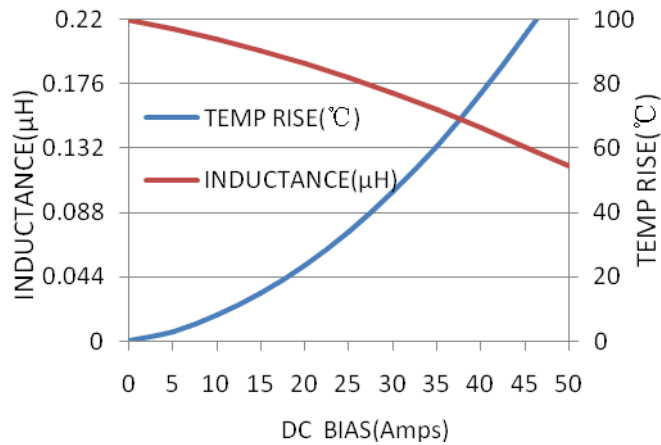


MWSA0603-R24MT

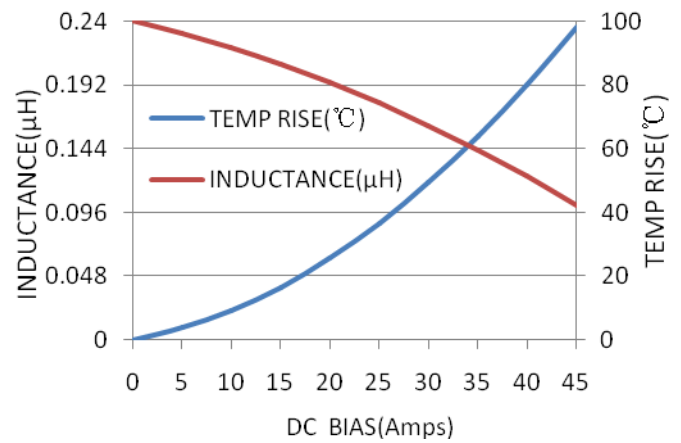


MWSA0603-R33MT

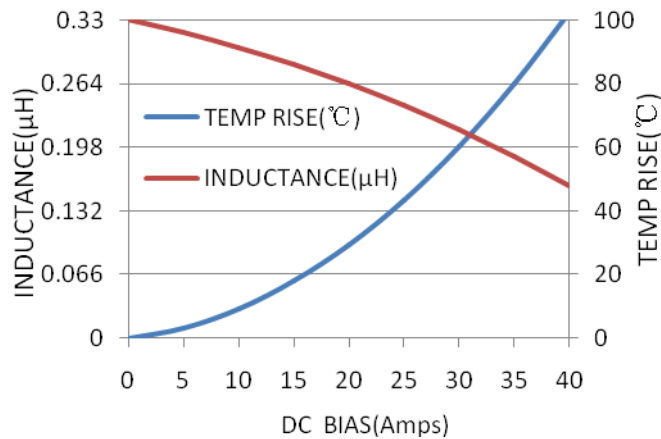


MWSA0603-R47MT

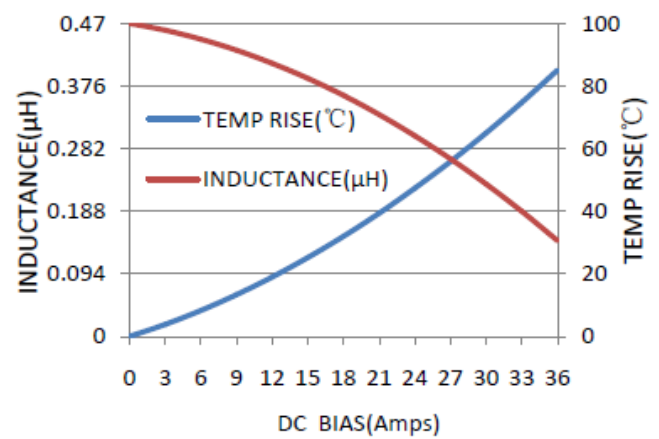

MWSA0603-R56MT

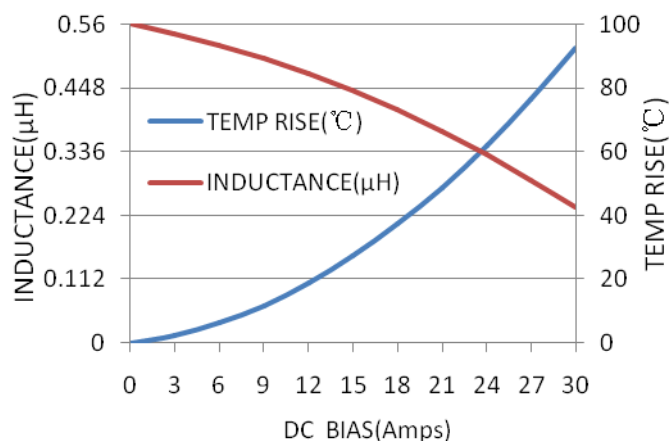


MWSA0603-R68MT

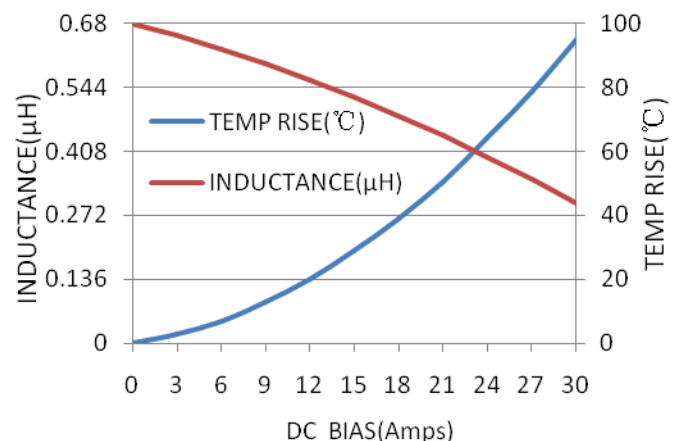





MWSA0603-R82MT

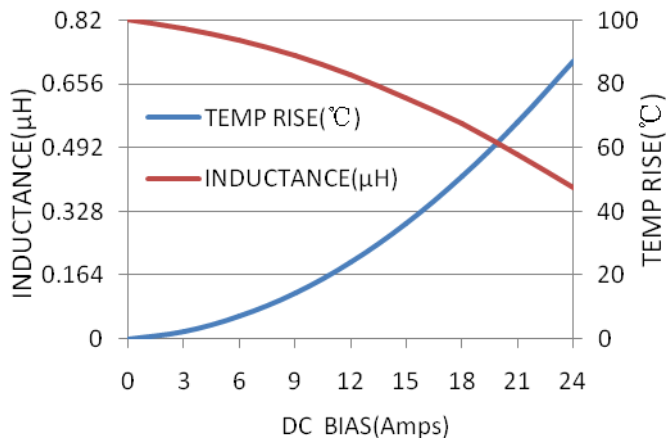


MWSA0603-1R0MT

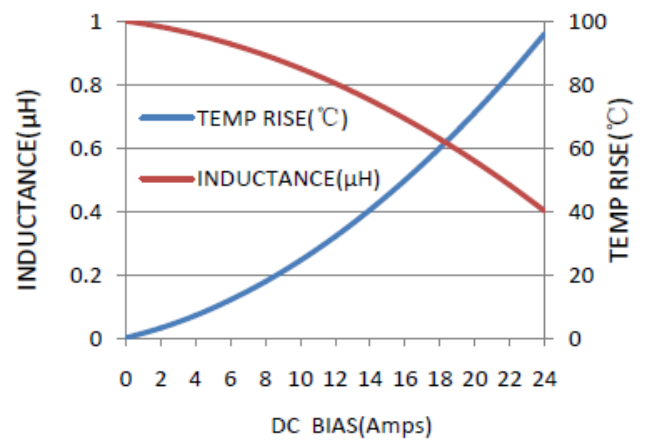


MWSA0603-1R5MT

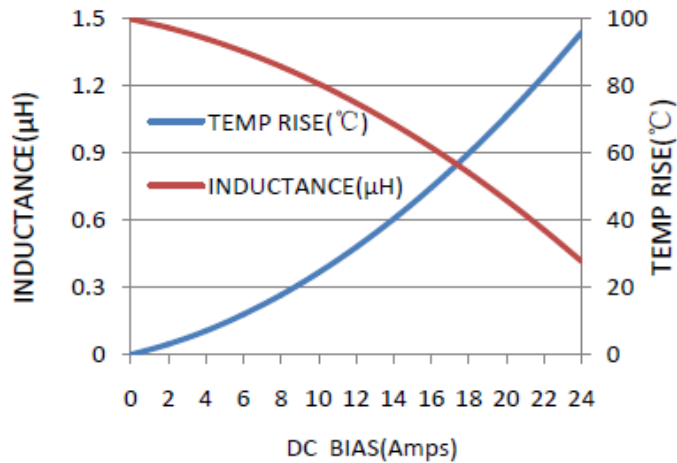


MWSA0603-2R2MT

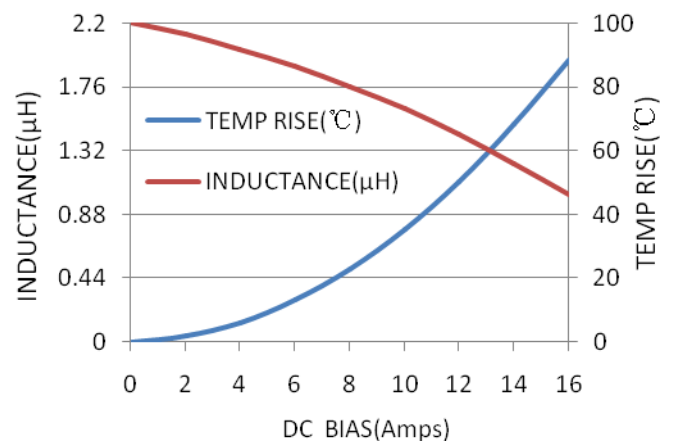


MWSA0603-3R3MT

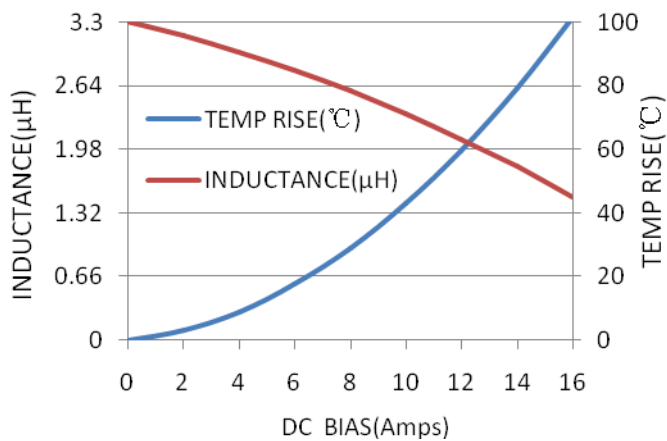


MWSA0603-4R7MT


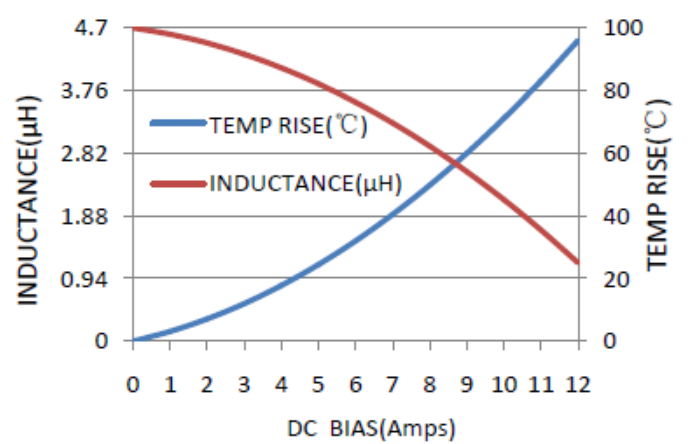


MWSA0603-6R8MT










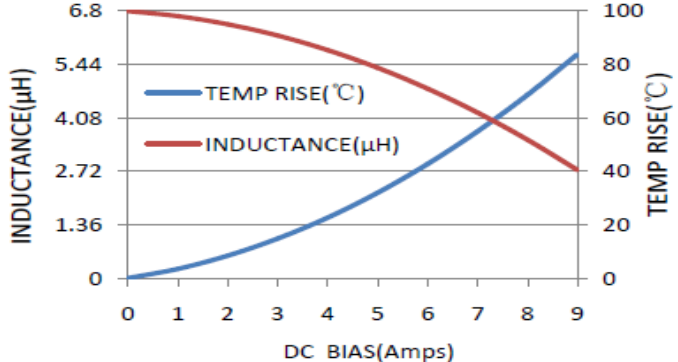


MWSA0603-8R2MT

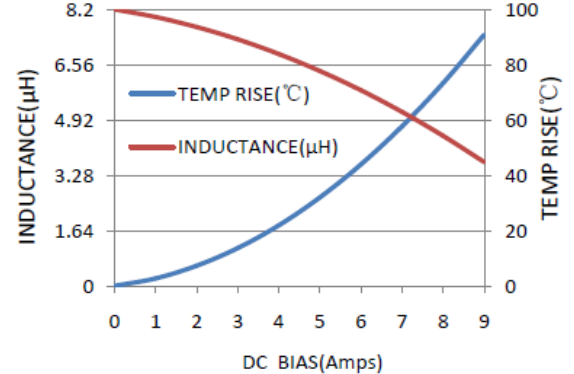


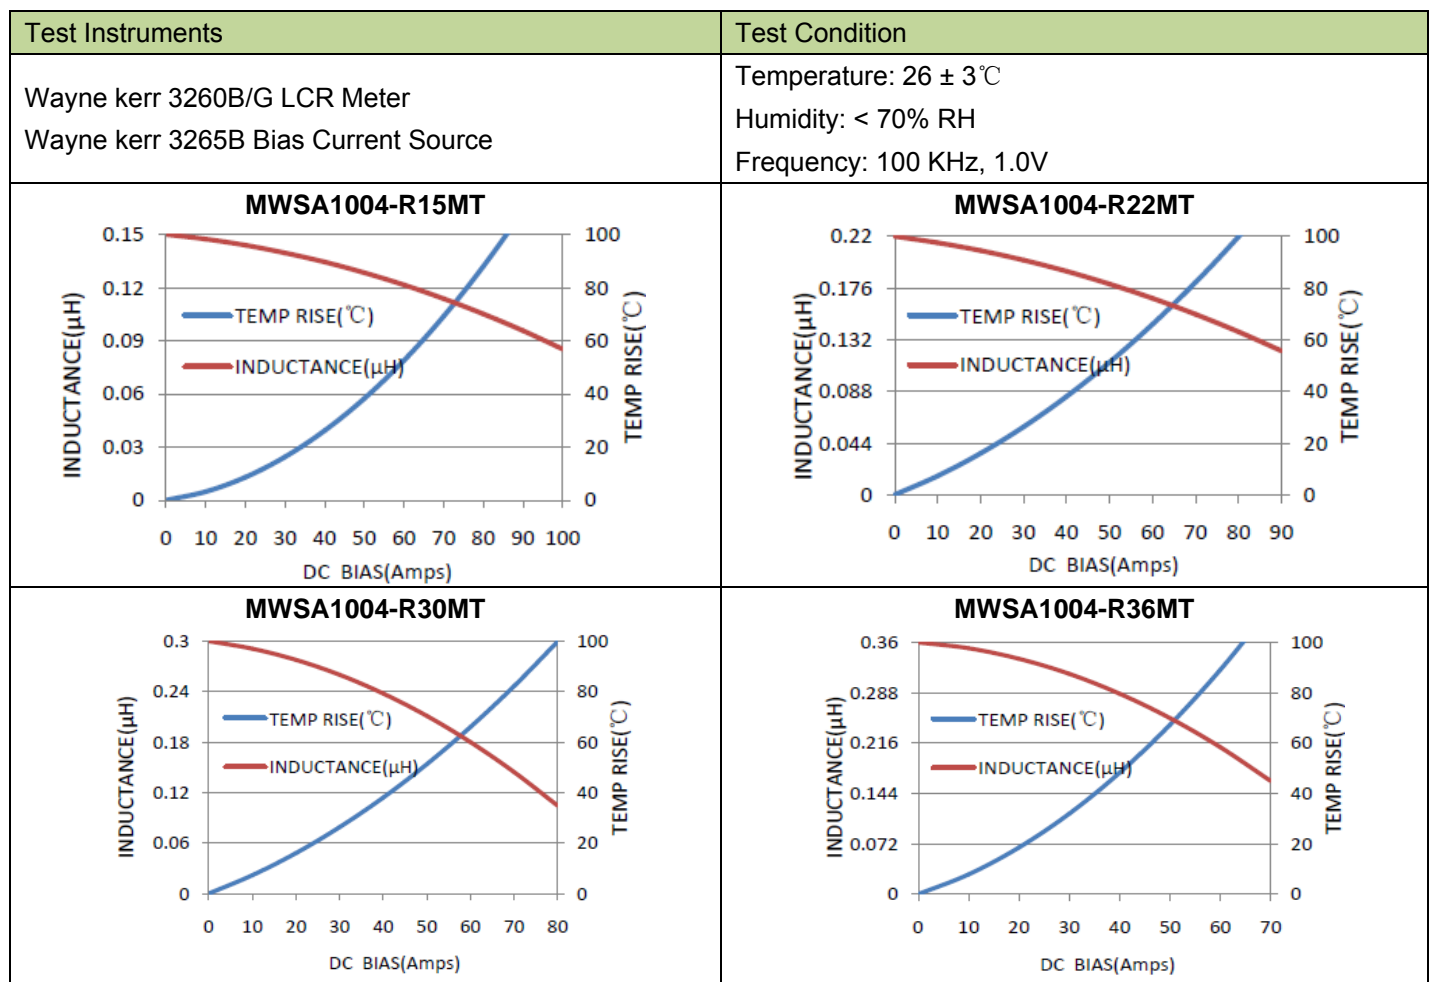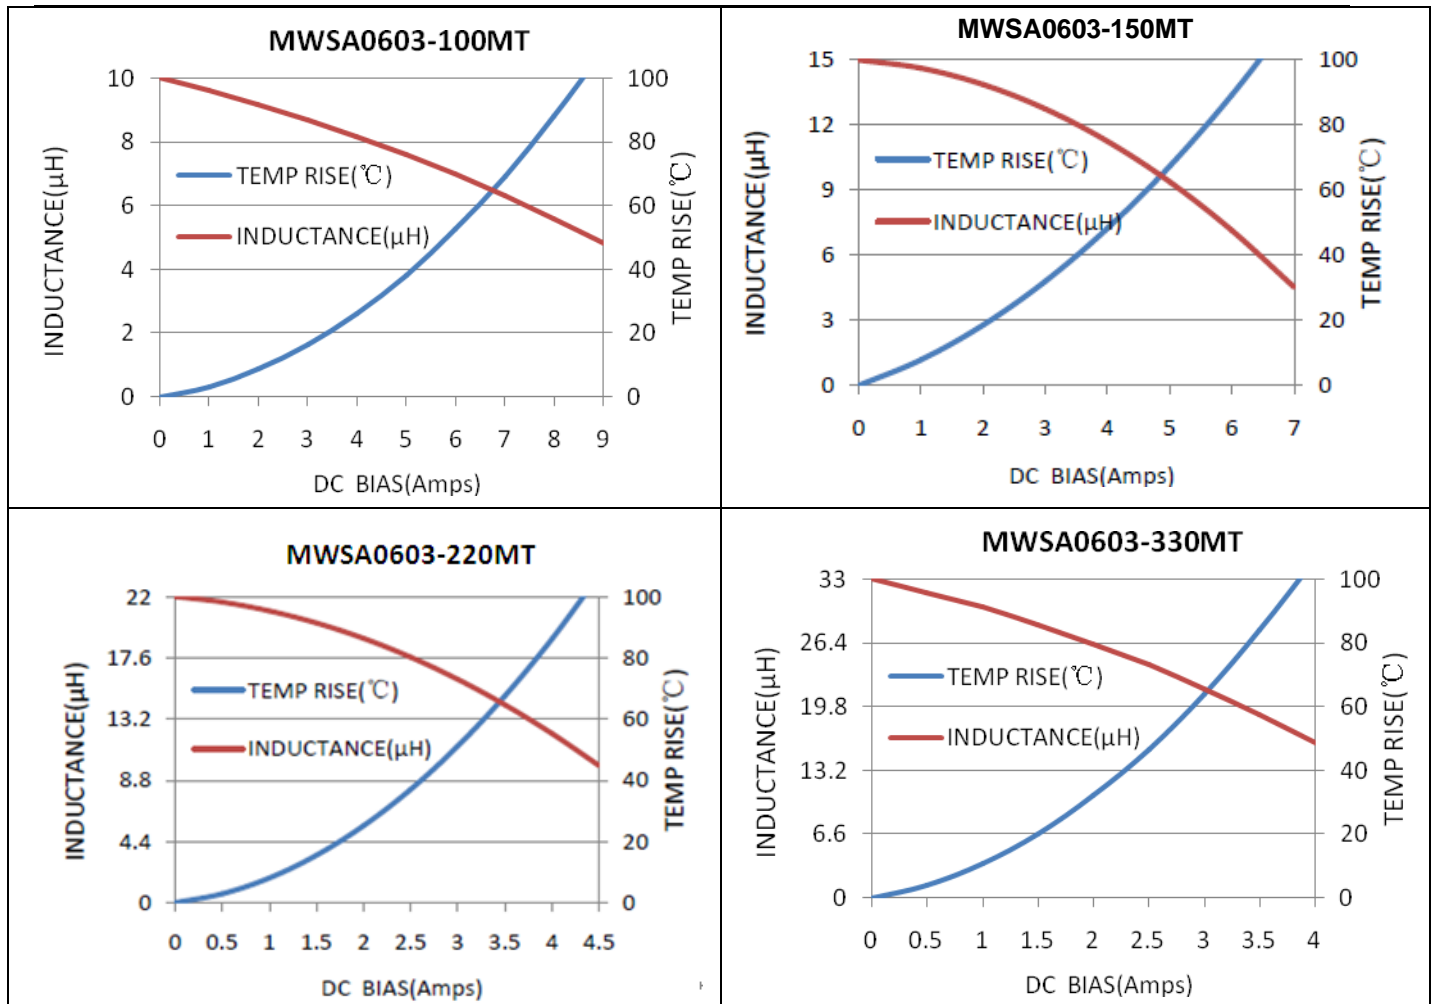




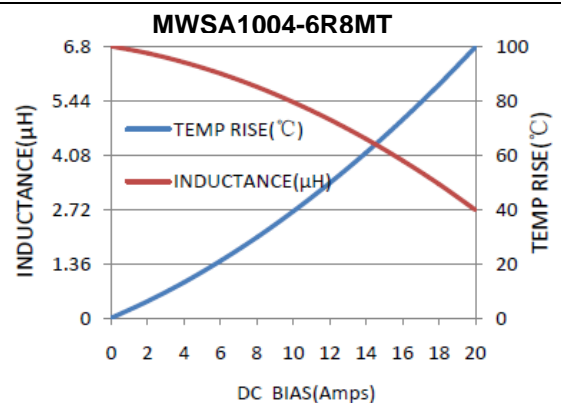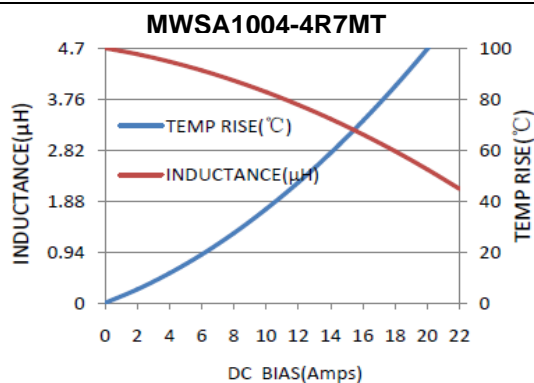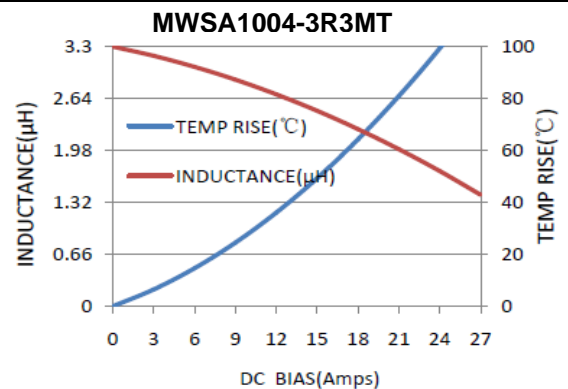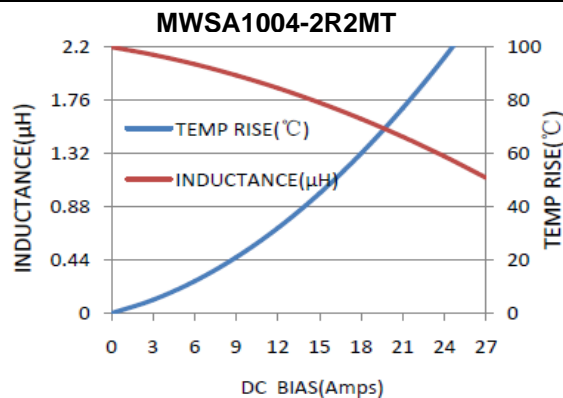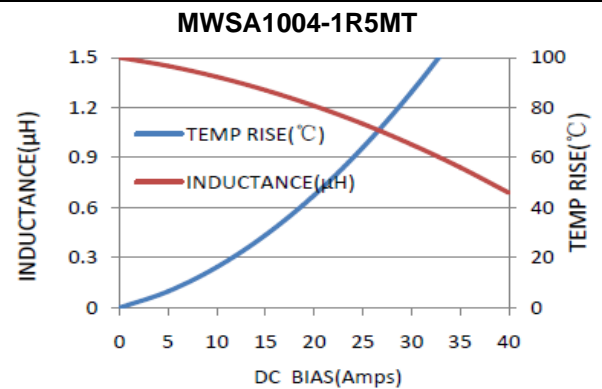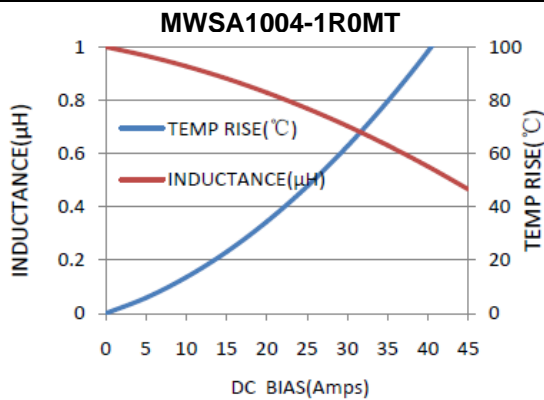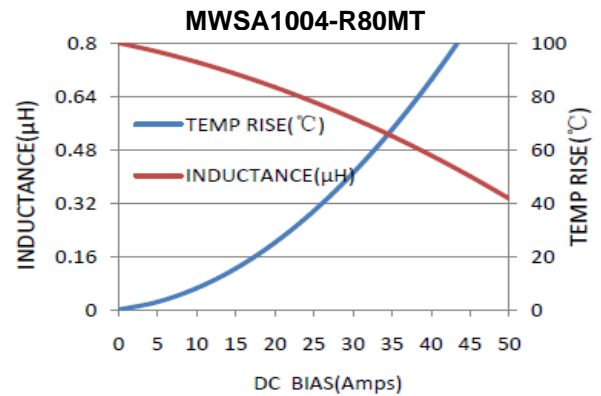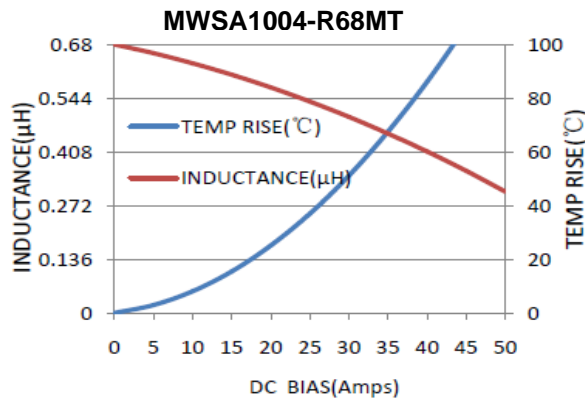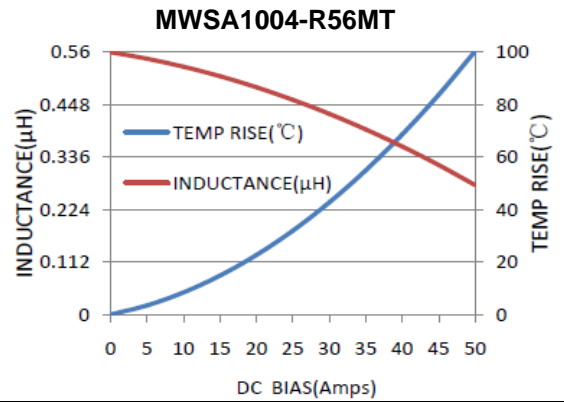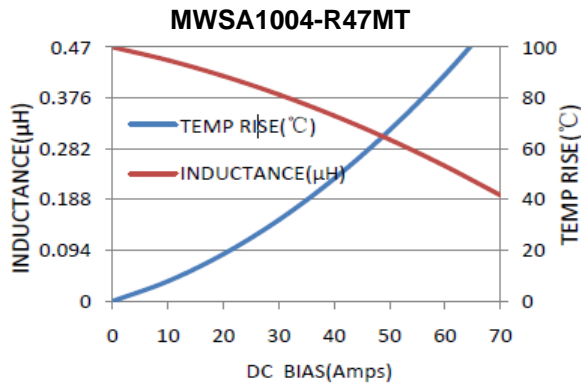


MWSA1004-8R2MT

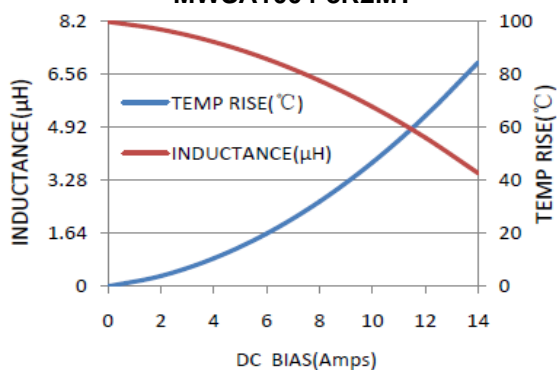


MWSA1004-100MT

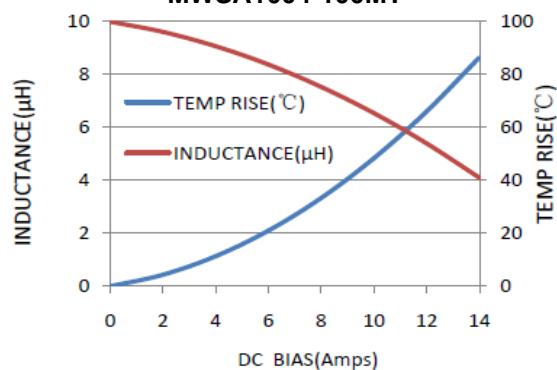


MWSA1004-150MT

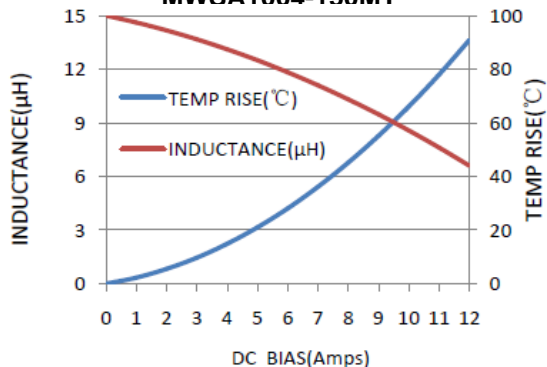


MWSA1004-220MT

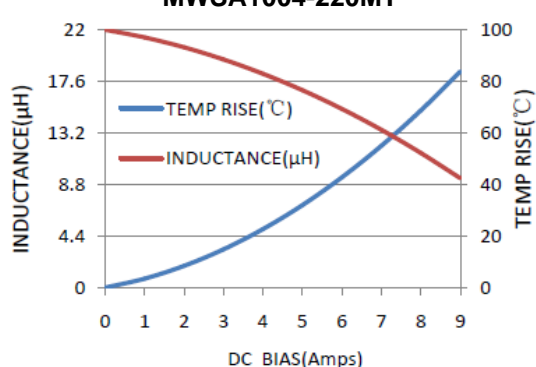


MWSA1004-330MT

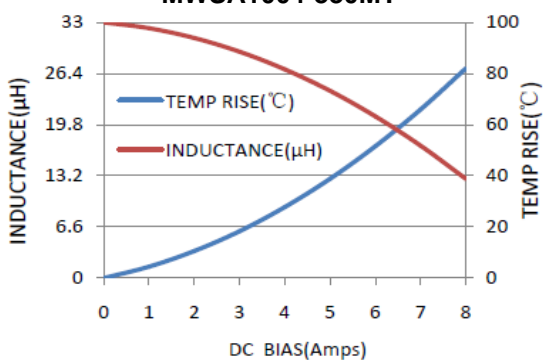

MWSA1004-470MT

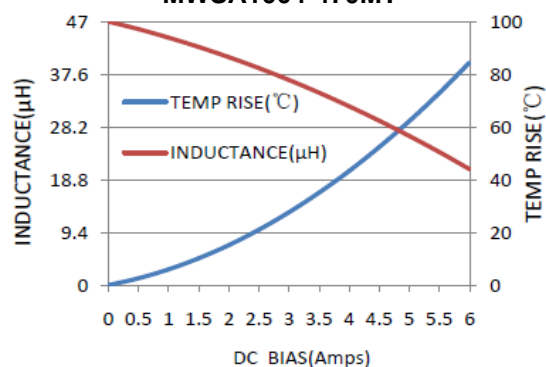

MWSA1004-680MT

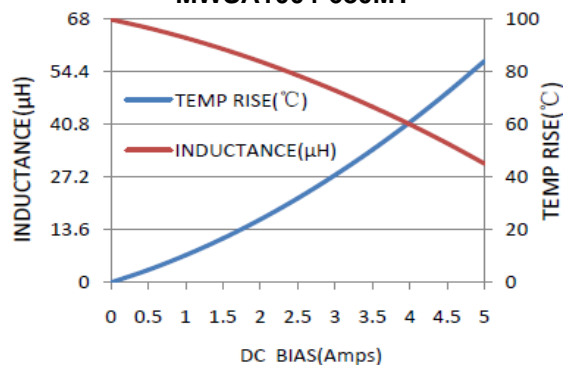

## Performance Graphs

## Test Instruments

Wayne kerr 3260B/G LCR Meter

Wayne kerr 3265B Bias Current Source

## Test Condition

Temperature:  $26 \pm 3^{\circ}\text{C}$ 

Humidity: &lt; 70% RH

Frequency: 100 KHz, 1.0V

